



- **Implementing Carbon Fiber Strips for Added Support**  
Implementing Carbon Fiber Strips for Added Support Exploring the Function of Steel I Beams in Reinforcement Evaluating Helical Pier Installations for Stability Understanding the Role of Push Piers in Foundation Repair Assessing Poly Foam Injection as a Repair Option Addressing Wall Bowing with Specialized Bracing Systems Incorporating Reinforced Footings in Existing Structures Using Fiber Reinforced Polymers for Structural Upgrades Recognizing Different Methods for Load Bearing Enhancement Integrating Modern Engineering Software for Precise Calculations Exploring Innovative Jacking Mechanisms for Floor Leveling Seeking Guidance from Structural Engineers for Advanced Repairs
- **Obtaining Local Building Permits for Foundation Work**  
Obtaining Local Building Permits for Foundation Work Meeting OSHA Regulations During Excavation Projects Understanding City Ordinances That Affect Repair Plans Coordinating Structural Engineer Reviews for Compliance Navigating Inspections from Municipal Authorities Adhering to Safety Protocols on Residential Job Sites Prioritizing Protective Equipment for Repair Crews Managing Noise and Debris Regulations in Urban Areas Recognizing Liability Concerns in Construction Zones Complying with Floodplain Requirements in Vulnerable Regions Satisfying Documentation Requirements for Property Records Maintaining Ethical Practices in Foundation Repair Services
- **About Us**



## **\* Understanding Soil Conditions and Their Impact on Pier Stability**

Okay, so you're putting in helical piers, right? Carbon fiber reinforcement strengthens walls in need of foundation wall repair service [residential foundation repair service](#) waterproofing. Smart move for a stable foundation. But listen, you can't just screw them into the ground and hope for the best. The key thing you absolutely *\*have\** to get right is understanding the soil. Seriously, it's everything.

Think of it like this: the soil is where your pier gets its grip. If it's loose, sandy stuff, your pier's going to struggle to hold anything up, like trying to grab onto smoke. Clay, on the other hand, can be strong, but it can also expand and contract with moisture, which can play havoc with your pier's stability over time. And let's not even talk about organic soils – they decompose and compact, which is a recipe for disaster.

So, what do you need to do? Get a soil report! Seriously, spend the money. It'll tell you the soil type, its density, its moisture content, and its bearing capacity. This information is gold. It tells you how deep you need to drive the pier, how much load it can handle, and whether you need to take any special precautions.

For example, if you're dealing with weak soil near the surface, you might need to drive the pier deeper to reach a more competent layer. Or, if you're in an area with high water tables, you might need to consider corrosion protection for the pier.

Ignoring the soil conditions is like building a house on sand. It might look good at first, but it's just a matter of time before things start to shift and crack. Understanding the soil is the foundation for a stable helical pier installation. Get it right, and you'll sleep soundly knowing your structure is secure. Get it wrong, and well, let's just say you'll be paying for it later.

## **\* Key Factors Affecting Helical Pier Installation Integrity**

Evaluating helical pier installations for stability hinges on understanding the key factors that affect their installation integrity. Think of it like baking a cake – you can have the best recipe (design), but if you don't follow the instructions carefully (installation), the result might be a soggy mess.

One critical aspect is *\*\*proper soil investigation\*\**. You need to know what you're screwing into! The soil's composition, strength, and groundwater levels dictate the pier's depth, size, and helix configuration. Ignoring this step is like guessing the oven temperature – potential for disaster.

Then comes the *\*\*installation process itself\*\**. The pier needs to be advanced at the correct torque, monitored closely, and installed to the specified depth. Too little torque and the pier

might not achieve the required capacity; too much, and you risk damaging the helix or even buckling the pier. It's like trying to force a screw in too quickly – you strip the threads and weaken the connection.

**\*\*Equipment calibration and operator skill\*\*** are also paramount. Using a properly calibrated torque motor ensures accurate readings, while an experienced operator can interpret these readings and adjust the installation technique as needed. A skilled operator can sense subtle changes in soil resistance and make informed decisions to ensure a solid installation. It's the difference between a seasoned carpenter and someone just picking up a hammer for the first time.

Finally, **\*\*material quality and manufacturing tolerances\*\*** play a role. Using substandard piers or those with manufacturing defects can compromise the entire system. You wouldn't build a house with rotten lumber, would you? The same principle applies here.

In essence, ensuring helical pier installation integrity is a multi-faceted process. It requires thorough planning, careful execution, and constant monitoring. Neglecting any of these factors can lead to instability and ultimately, failure of the foundation. So, pay attention to the details, just like you would when baking that perfect cake!

### **\* Critical Inspection Points During and After Installation**

Okay, so you're putting in helical piers, right? Smart move, especially if you've got some iffy soil going on. But here's the deal: just sticking them in the ground isn't enough. You've gotta keep a sharp eye out, both while they're going in and after, to make sure they're actually doing their job and not just becoming expensive metal decorations. We're talking stability here, the whole point of the exercise.

During installation, the first thing I'm watching is the torque. Your engineer should have given you a target torque range, and you need to hit it. This is your primary indicator that the pier is biting into competent soil and achieving the required load-bearing capacity. If you're spinning the pier in like butter and the torque's way low, something's wrong. Stop. Figure it out. Maybe you hit a void, maybe the soil is weaker than expected. Don't just keep going and hope for the best. That's a recipe for disaster. Also, keep an eye on the pier itself; is it bending or buckling under the pressure? That's a huge red flag. And of course, proper alignment is crucial. You don't want the pier wandering off course during installation because that can compromise its ability to support the load properly.

Okay, so the piers are in, and you're feeling good. Don't relax just yet. Post-installation, you've got a few more things to check. First, immediately after installation, verify the final torque readings. Make sure they are within the acceptable range. Document everything meticulously. Then, you need to ensure proper connection to the structure. Is the bracket securely attached to both the pier and the foundation? Are all the bolts tightened to the correct specification? No shortcuts here. And finally, give it some time and monitor the

structure for any signs of settlement. Hairline cracks in the drywall, doors that stick, floors that slope – these could be indicators that the piers aren't performing as expected. Regular inspections, especially in the first few months after installation, are essential.

Basically, think of it like this: helical piers are a precision instrument for stabilizing a structure. They're only as good as the care and attention you give them during and after installation. So, be vigilant, be thorough, and don't be afraid to ask questions if something doesn't look or feel right. Your structure's stability depends on it.

### **\* Common Signs of Instability and Potential Causes**

Okay, so you're out there evaluating a helical pier installation, looking for stability. What are the red flags, the little whispers that something might not be quite right? And what could be causing those whispers?

First, let's talk about the obvious stuff. Obvious, but sometimes overlooked. Is the structure that the piers are supporting showing any new cracks, especially in the foundation or walls? Are doors and windows sticking that didn't used to? These are classic signs of movement, and while not *\*always\** pier-related, they warrant a closer look. Think of it like this: if your house is suddenly developing a limp, you need to figure out why.

Then there's the pier itself. A big one is visible movement or deflection of the pier shaft. Is it leaning in a way it definitely wasn't before? Is there any bending or buckling? This screams instability. Corrosion is another sneaky culprit. Rust is a natural process, sure, but excessive corrosion, especially near the connection points or in areas exposed to harsh soil conditions, can seriously weaken the pier.

What about the soil around the pier? Any signs of heaving or settling? Gaps forming between the pier and the surrounding soil? These could indicate that the soil is failing to provide adequate support, putting undue stress on the pier.

Okay, so those are some common signs. Now, what could be causing them?

A big one is improper installation. Did they use the right size and type of pier for the soil conditions and the load it's supposed to bear? Were they installed to the correct depth and torque? If the installation was shoddy, you're setting yourself up for problems down the road.

Then there's the soil itself. Soil conditions can change over time. Increased moisture content, erosion, even changes in the water table can all affect the soil's ability to support the pier. Maybe the soil wasn't properly tested before the piers were installed, and it turns out it's less stable than originally thought.

Overloading is another possibility. Has the structure's load increased since the piers were installed? Maybe an addition was built, or heavy machinery was added to the building. If the

piers are being asked to support more weight than they were designed for, they're going to struggle.

Finally, don't forget about environmental factors. Things like earthquakes, frost heave, and even tree root growth can put stress on the piers and contribute to instability.

Basically, evaluating helical pier stability is about paying attention to the details. Look for the subtle signs of movement, consider the potential causes, and don't be afraid to call in a qualified professional for a thorough inspection if you have any concerns. It's better to be proactive than to wait for a small problem to become a big, expensive one.

### **\* Methods for Assessing Pier Load Capacity and Performance**

Okay, so you're looking at helical pier installations, making sure they're stable, and you're wondering how to actually *\*check\** if the piers are doing their job, right? Well, there's a few ways to go about assessing their load capacity and how well they're performing. It's not just a "set it and forget it" kind of thing.

One common method is load testing. Basically, you apply increasing loads to the pier after installation and monitor its movement (or settlement). This gives you a direct measurement of how much weight the pier can handle before it starts to give way. There are different types of load tests, like proof tests (where you apply a specific load to verify it meets a minimum requirement) and performance tests (where you push the pier to its ultimate capacity to see where it breaks). This is pretty straightforward but can be time-consuming and expensive.

Another approach involves using torque correlation. During installation, the amount of torque required to screw the pier into the ground is recorded. There's a relationship between this torque and the pier's estimated load capacity, based on the pier's design and the soil conditions. This is a quick and relatively inexpensive method, but it's an indirect measurement, so it relies on accurate soil information and a good understanding of the correlation.

Then you've got methods that involve monitoring the pier's performance over time. This could include things like visual inspections looking for signs of settlement, corrosion, or other damage. You might also use surveying techniques to precisely measure any movement of the structure supported by the piers. This isn't a one-time assessment; it's more of an ongoing process to ensure long-term stability.

Ultimately, the best approach for evaluating helical pier installations depends on the specific project, the soil conditions, the loads involved, and the budget. Often, a combination of methods offers the most comprehensive assessment of pier capacity and performance. You want to be sure those piers are holding up their end of the bargain!

## **\* Remedial Actions for Addressing Unstable Helical Piers**

Okay, so we've got a helical pier installation that's showing signs of instability. Not good. We need to talk about fixing that. Think of it like this: the ground isn't cooperating, and our piers are wiggling when they really should be solid as a rock. What's the game plan?

First, *\*diagnosis is key\**. We need to figure out *\*why\** the pier is unstable. Is it poor soil? Was the pier under-torqued during installation? Is there a water table issue causing soil softening? A thorough geotechnical investigation is crucial. We're talking soil borings, maybe some cone penetration testing, the whole nine yards. Knowing the enemy (the soil conditions) is half the battle.

Once we understand the problem, we can start thinking about remedial actions. One option is *\*supplemental pier installation\**. Basically, we're adding more piers adjacent to the unstable one to share the load. It's like giving your weak friend a buddy to lean on. These new piers need to be installed properly, reaching competent soil and adequately torqued.

Another approach might involve *\*grouting\**. We can inject grout around the unstable pier to stabilize the surrounding soil. This essentially creates a reinforced soil matrix, providing greater resistance to movement. Think of it like injecting concrete into the gaps around the pier, stiffening everything up. Different types of grout exist, and the right one depends on the soil type and the nature of the instability.

Sometimes, the only solution is *\*replacement\**. If the original pier was undersized or installed improperly, pulling it out and putting in a larger, properly installed pier might be necessary. This is the most disruptive option, but sometimes it's the only way to guarantee long-term stability.

Finally, *\*drainage improvements\** can be critical, especially if water is contributing to the problem. Redirecting surface water away from the pier and installing subsurface drains can prevent soil saturation and maintain soil strength. A dry pier is a happy pier.

Ultimately, the right remedial action depends on the specific situation. There's no one-size-fits-all solution. It requires careful evaluation, expert judgment, and a healthy dose of engineering know-how. The goal is always the same: to ensure the long-term stability and safety of the structure relying on those helical piers.

## **\* Importance of Professional Evaluation and Certification**

Let's talk frankly about helical piers. You've got these metal shafts, screwed deep into the ground, holding up a structure. Sounds simple enough, right? But like anything that involves engineering, load bearing, and the long-term stability of something you probably care deeply about (like your home, or a commercial building), "simple" is a dangerous illusion. That's where professional evaluation and certification come in, and frankly, why they're absolutely

vital when it comes to helical pier installations.

Think about it. Someone installs these piers. How do you *\*really\** know they're doing it right? Are they using the correct type of pier for the soil conditions? Are they torquing them to the appropriate depth to achieve the necessary load-bearing capacity? Are they even *\*capable\** of accurately assessing these factors in the first place? A visual inspection might catch the obviously bad stuff, but it won't tell you if the piers are subtly failing, shifting, or destined to become a problem down the line.

That's where a qualified professional evaluator steps in. They're not just eyeballing it; they're using specialized equipment, applying engineering principles, and adhering to established standards to analyze the installation. They're looking for things you wouldn't even think to look for, verifying that the piers are performing as designed and providing the intended support. Certification, then, is the stamp of approval. It's assurance that the installation has been rigorously assessed and meets the required criteria.


Skipping this step is like building a house on a shaky foundation – literally. You might save some money upfront, but you're setting yourself up for potential disaster. Foundation problems are notoriously expensive and disruptive to fix. Imagine cracks in your walls, uneven floors, doors that won't close properly. And that's just the cosmetic stuff. The structural integrity of your building could be compromised, putting everything – and everyone – at risk.

So, while helical piers can be a fantastic solution for foundation repair or new construction, don't cut corners. Insist on professional evaluation and certification. It's not just about peace of mind; it's about ensuring the long-term stability, safety, and value of your investment. It's an investment in doing things right, the first time, and knowing that your foundation is truly solid.


## About soil mechanics




**This article may be too long to read and navigate comfortably.** Consider splitting content into sub-articles, condensing it, or adding subheadings. Please discuss this issue on the article's talk page. *(February 2025)*

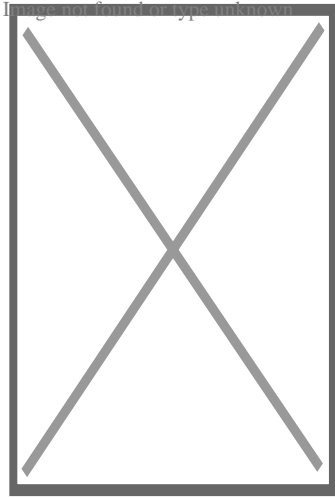

The Leaning Tower of Pisa – an example of a problem due to deformation of soil

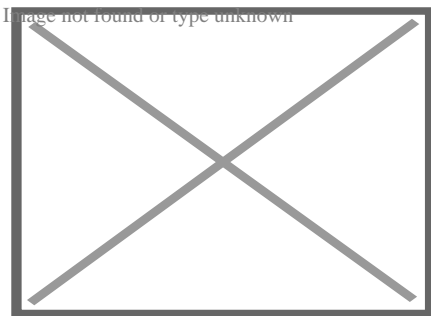


Slope instability issues for a temporary flood control levee in North Dakota, 2009

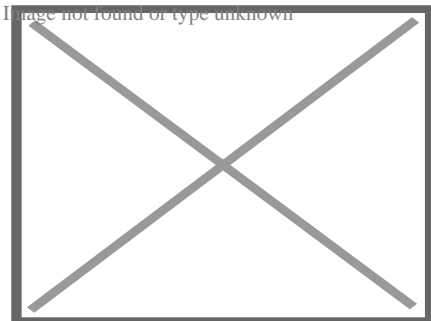

Earthwork in Germany



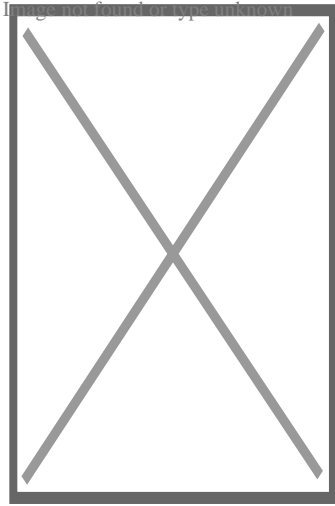

Fox Glacier, New Zealand: Soil produced and transported by intense weathering and erosion

**Soil mechanics** is a branch of soil physics and applied mechanics that describes the behavior of soils. It differs from fluid mechanics and solid mechanics in the sense that soils consist of a heterogeneous mixture of fluids (usually air and water) and particles (usually clay, silt, sand, and gravel) but soil may also contain organic solids and other matter.<sup>[1][2][3][4]</sup> Along with rock mechanics, soil mechanics provides the theoretical basis for analysis in geotechnical engineering,<sup>[5]</sup> a subdiscipline of civil engineering, and engineering geology, a subdiscipline of geology. Soil mechanics is used to analyze the deformations of and flow of fluids within natural and man-made structures that are supported on or made of soil, or structures that are buried in soils.<sup>[6]</sup> Example applications are building and bridge foundations, retaining walls, dams, and buried pipeline systems. Principles of soil mechanics are also used in related disciplines such as geophysical engineering, coastal engineering, agricultural engineering, and hydrology.

This article describes the genesis and composition of soil, the distinction between *pore water pressure* and inter-granular *effective stress*, capillary action of fluids in the soil pore spaces, *soil classification*, *seepage* and *permeability*, time dependent change of volume due to squeezing water out of tiny pore spaces, also known as *consolidation*, *shear strength* and stiffness of soils. The shear strength of soils is primarily derived from friction between the particles and interlocking, which are very sensitive to the effective stress.<sup>[7][6]</sup> The article concludes with some examples of applications of the principles of soil mechanics such as slope stability, lateral earth pressure on retaining walls, and bearing capacity of foundations.

## Genesis and composition of soils

[edit]

## Genesis

[edit]

The primary mechanism of soil creation is the weathering of rock. All rock types (igneous rock, metamorphic rock and sedimentary rock) may be broken down into small particles to create soil. Weathering mechanisms are physical weathering, chemical weathering, and biological weathering [1][2][3] Human activities such as excavation, blasting, and waste disposal, may also create soil. Over geologic time, deeply buried soils may be altered by pressure and temperature to become metamorphic or sedimentary rock, and if melted and solidified again, they would complete the geologic cycle by becoming igneous rock.[3]

Physical weathering includes temperature effects, freeze and thaw of water in cracks, rain, wind, impact and other mechanisms. Chemical weathering includes dissolution of matter composing a rock and precipitation in the form of another mineral. Clay minerals, for example can be formed by weathering of feldspar, which is the most common mineral present in igneous rock.

The most common mineral constituent of silt and sand is quartz, also called silica, which has the chemical name silicon dioxide. The reason that feldspar is most common in rocks but silica is more prevalent in soils is that feldspar is much more soluble than silica.


Silt, Sand, and Gravel are basically little pieces of broken rocks.

According to the Unified Soil Classification System, silt particle sizes are in the range of 0.002 mm to 0.075 mm and sand particles have sizes in the range of 0.075 mm to 4.75 mm.

Gravel particles are broken pieces of rock in the size range 4.75 mm to 100 mm. Particles larger than gravel are called cobbles and boulders.[1][2]

## Transport

[edit]

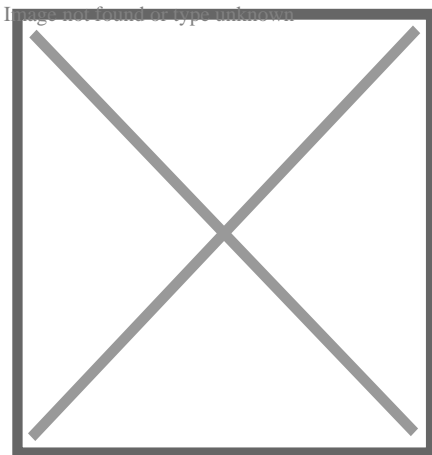

Example soil horizons. a) top soil and colluvium b) mature residual soil c) young residual soil d) weathered rock

Soil deposits are affected by the mechanism of transport and deposition to their location. Soils that are not transported are called residual soils—they exist at the same location as the rock from which they were generated. Decomposed granite is a common example of a residual soil. The common mechanisms of transport are the actions of gravity, ice, water, and wind. Wind blown soils include dune sands and loess. Water carries particles of different size depending on the speed of the water, thus soils transported by water are graded according to their size. Silt and clay may settle out in a lake, and gravel and sand collect at the bottom of a river bed. Wind blown soil deposits (aeolian soils) also tend to be sorted according to their grain size. Erosion at the base of glaciers is powerful enough to pick up large rocks and boulders as well as soil; soils dropped by melting ice can be a well graded mixture of widely varying particle sizes. Gravity on its own may also carry particles down from the top of a mountain to make a pile of soil and boulders at the base; soil deposits transported by gravity are called colluvium.<sup>[1][2]</sup>

The mechanism of transport also has a major effect on the particle shape. For example, low velocity grinding in a river bed will produce rounded particles. Freshly fractured colluvium particles often have a very angular shape.

## Soil composition

[edit]

## Soil mineralogy

[edit]

Silts, sands and gravels are classified by their size, and hence they may consist of a variety of minerals. Owing to the stability of quartz compared to other rock minerals, quartz is the most common constituent of sand and silt. Mica, and feldspar are other common minerals present in sands and silts.<sup>[1]</sup> The mineral constituents of gravel may be more similar to that of the parent rock.

The common clay minerals are montmorillonite or smectite, illite, and kaolinite or kaolin. These minerals tend to form in sheet or plate like structures, with length typically ranging between  $10^{-7}$  m and  $4 \times 10^{-6}$  m and thickness typically ranging between  $10^{-9}$  m and  $2 \times 10^{-6}$  m, and they have a relatively large specific surface area. The specific surface area (SSA) is defined as the ratio of the surface area of particles to the mass of the particles. Clay minerals typically have specific surface areas in the range of 10 to 1,000 square meters per gram of solid.<sup>[3]</sup> Due to the large surface area available for chemical, electrostatic, and van der Waals interaction, the mechanical behavior of clay minerals is very sensitive to the amount of pore fluid available and the type and amount of dissolved ions in the pore fluid.<sup>[1]</sup>

The minerals of soils are predominantly formed by atoms of oxygen, silicon, hydrogen, and aluminum, organized in various crystalline forms. These elements along with calcium, sodium, potassium, magnesium, and carbon constitute over 99 per cent of the solid mass of soils.<sup>[1]</sup>

## Grain size distribution

[edit]


Main article: Soil gradation

Soils consist of a mixture of particles of different size, shape and mineralogy. Because the size of the particles obviously has a significant effect on the soil behavior, the grain size and grain size distribution are used to classify soils. The grain size distribution describes the relative proportions of particles of various sizes. The grain size is often visualized in a cumulative distribution graph which, for example, plots the percentage of particles finer than a given size as a function of size. The median grain size,  $D_{50}$ , which 50% of the particle mass consists of finer particles. Soil behavior, especially the hydraulic conductivity, tends to be dominated by the smaller particles, hence, the term "effective size", denoted by  $D_{10}$  as the size for which 10% of the particle mass consists of finer particles.

Sands and gravels that possess a wide range of particle sizes with a smooth distribution of particle sizes are called *well graded* soils. If the soil particles in a sample are predominantly in a relatively narrow range of sizes, the sample is *uniformly graded*. If a soil sample has distinct gaps in the gradation curve, e.g., a mixture of gravel and fine sand, with no coarse sand, the sample may be *gap graded*. *Uniformly graded* and *gap graded* soils are both considered to be *poorly graded*. There are many methods for measuring particle-size distribution. The two traditional methods are sieve analysis and hydrometer analysis.

## Sieve analysis

[edit]

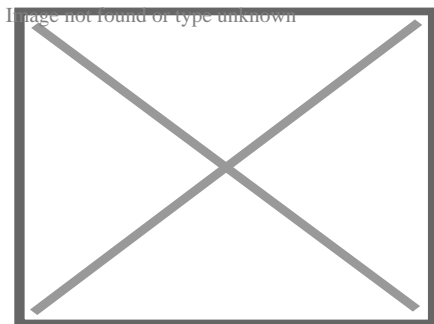

Sieve

The size distribution of gravel and sand particles are typically measured using sieve analysis. The formal procedure is described in ASTM D6913-04(2009).<sup>[8]</sup> A stack of sieves with accurately dimensioned holes between a mesh of wires is used to separate the particles into size bins. A known volume of dried soil, with clods broken down to individual particles, is put into the top of a stack of sieves arranged from coarse to fine. The stack of sieves is shaken for

a standard period of time so that the particles are sorted into size bins. This method works reasonably well for particles in the sand and gravel size range. Fine particles tend to stick to each other, and hence the sieving process is not an effective method. If there are a lot of fines (silt and clay) present in the soil it may be necessary to run water through the sieves to wash the coarse particles and clods through.

A variety of sieve sizes are available. The boundary between sand and silt is arbitrary. According to the Unified Soil Classification System, a #4 sieve (4 openings per inch) having 4.75 mm opening size separates sand from gravel and a #200 sieve with an 0.075 mm opening separates sand from silt and clay. According to the British standard, 0.063 mm is the boundary between sand and silt, and 2 mm is the boundary between sand and gravel.<sup>[3]</sup>

## Hydrometer analysis


[edit]

The classification of fine-grained soils, i.e., soils that are finer than sand, is determined primarily by their Atterberg limits, not by their grain size. If it is important to determine the grain size distribution of fine-grained soils, the hydrometer test may be performed. In the hydrometer tests, the soil particles are mixed with water and shaken to produce a dilute suspension in a glass cylinder, and then the cylinder is left to sit. A hydrometer is used to measure the density of the suspension as a function of time. Clay particles may take several hours to settle past the depth of measurement of the hydrometer. Sand particles may take less than a second. Stokes' law provides the theoretical basis to calculate the relationship between sedimentation velocity and particle size. ASTM provides the detailed procedures for performing the Hydrometer test.

Clay particles can be sufficiently small that they never settle because they are kept in suspension by Brownian motion, in which case they may be classified as colloids.

## Mass-volume relations

[edit]

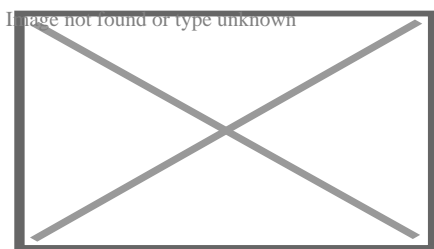

A phase diagram of soil indicating the masses and volumes of air, solid, water, and voids

There are a variety of parameters used to describe the relative proportions of air, water and solid in a soil. This section defines these parameters and some of their interrelationships.<sup>[2][6]</sup>  
The basic notation is as follows:

$\displaystyle V_s, V_w, V_a$  are the volumes of air, water and solids in a soil mixture;

$\displaystyle W_s, W_w, W_a$  are the weights of air, water and solids in a soil mixture;

$\displaystyle M_s, M_w, M_a$  are the masses of air, water and solids in a soil mixture;

$\displaystyle \rho_s, \rho_w, \rho_a$  represent the densities of the constituents (air, water and solids) in a soil mixture;

Note that the weights,  $W$ , can be obtained by multiplying the mass,  $M$ , by the acceleration due to gravity,  $g$ ; e.g.,  $\displaystyle W_s = M_s g$

Specific Gravity is the ratio of the density of one material compared to the density of pure water  
 $\displaystyle \rho_w = 1 \text{ g/cm}^3$

$$G_s = \frac{\rho_s}{\rho_w}$$

*Specific gravity of solids,*

Note that specific weight, conventionally denoted by the symbol  $\gamma$ , may be obtained by multiplying the density ( $\rho$ ) of a material by the acceleration due to gravity,  $\displaystyle \gamma = \rho g$

*Density, bulk density, or wet density,*  $\rho$  are different names for the density of the mixture, i.e., the total mass of air, water, solids divided by the total volume of air water and solids (the mass of air is assumed to be zero for practical purposes):

$$\rho = \frac{M_s + M_w}{V_s + V_w + V_a} = \frac{M_t}{V_t}$$

Image not found or type unknown

*Dry density,*  $\rho_d$  is the mass of solids divided by the total volume of air water and solids:

$$\rho_d = \frac{M_s}{V_s + V_w + V_a} = \frac{M_s}{V_t}$$

Image not found or type unknown

*Buoyant density,*  $\rho'$  defined as the density of the mixture minus the density of water is useful if the soil is submerged under water:

$$\rho' = \rho - \rho_w$$

Image not found or type unknown

where  $\rho_w$  is the density of water

Image not found or type unknown

**Water content**,  $w$ , is the ratio of mass of water to mass of solid. It is easily measured by weighing a sample of the soil, drying it out in an oven and re-weighing. Standard procedures are described by ASTM.

$$w = \frac{M_w}{M_s} = \frac{W_w}{W_s}$$

Image not found or type unknown

**Void ratio**,  $e$ , is the ratio of the volume of voids to the volume of solids:

$$e = \frac{V_v}{V_s} = \frac{V_t - V_s}{V_s} = \frac{n}{1-n}$$

Image not found or type unknown

**Porosity**,  $n$ , is the ratio of volume of voids to the total volume, and is related to the void ratio:

$$n = \frac{V_v}{V_t} = \frac{V_v}{V_s + V_v} = \frac{e}{1+e}$$

Image not found or type unknown

**Degree of saturation**,  $S$ , is the ratio of the volume of water to the volume of voids:

$$S = \frac{V_w}{V_v}$$

Image not found or type unknown

From the above definitions, some useful relationships can be derived by use of basic algebra.

$$\rho = \frac{(G_s + Se)\rho_w}{1+e}$$

Image not found or type unknown

$$\rho = \frac{(1+w)G_s\rho_w}{1+e}$$

Image not found or type unknown

$$w = \frac{Se}{G_s}$$

Image not found or type unknown

## Soil classification

[edit]

Geotechnical engineers classify the soil particle types by performing tests on disturbed (dried, passed through sieves, and remolded) samples of the soil. This provides information about the characteristics of the soil grains themselves. Classification of the types of grains present in a soil does not <sup>[clarification needed]</sup> account for important effects of the *structure* or *fabric* of the soil, terms that describe compactness of the particles and patterns in the arrangement of particles in a load carrying framework as well as the pore size and pore fluid distributions. Engineering geologists also classify soils based on their genesis and depositional history.

## Classification of soil grains

[edit]

In the US and other countries, the Unified Soil Classification System (USCS) is often used for soil classification. Other classification systems include the British Standard BS 5930 and the AASHTO soil classification system.<sup>[3]</sup>

## Classification of sands and gravels

[edit]

In the USCS, gravels (given the symbol *G*) and sands (given the symbol *S*) are classified according to their grain size distribution. For the USCS, gravels may be given the classification symbol *GW* (well-graded gravel), *GP* (poorly graded gravel), *GM* (gravel with a large amount of silt), or *GC* (gravel with a large amount of clay). Likewise sands may be classified as being *SW*, *SP*, *SM* or *SC*. Sands and gravels with a small but non-negligible amount of fines (5–12%) may be given a dual classification such as *SW-SC*.

## Atterberg limits

[edit]

Clays and Silts, often called 'fine-grained soils', are classified according to their Atterberg limits; the most commonly used Atterberg limits are the *liquid limit* (denoted by *LL* or  $w_L$ ), *plastic limit* (denoted by *PL* or  $w_p$ ) and *shrinkage limit* (denoted by *SL*).

The liquid limit is the water content at which the soil behavior transitions from a plastic solid to a liquid. The plastic limit is the water content at which the soil behavior transitions from that of a plastic solid to a brittle solid. The Shrinkage Limit corresponds to a water content below which the soil will not shrink as it dries. The consistency of fine grained soil varies in proportional to the water content in a soil.

As the transitions from one state to another are gradual, the tests have adopted arbitrary definitions to determine the boundaries of the states. The liquid limit is determined by measuring the water content for which a groove closes after 25 blows in a standard test.<sup>[9]</sup><sup>[clarification needed]</sup> Alternatively, a fall cone test apparatus may be used to measure the liquid limit. The undrained shear strength of remolded soil at the liquid limit is approximately 2 kPa.<sup>[4]</sup><sup>[10]</sup> The plastic limit is the water content below which it is not possible to roll by hand the soil into 3 mm diameter cylinders. The soil cracks or breaks up as it is rolled down to this diameter. Remolded soil at the plastic limit is quite stiff, having an undrained shear strength of the order of about 200 kPa.<sup>[4]</sup><sup>[10]</sup>



The *plasticity index* of a particular soil specimen is defined as the difference between the liquid limit and the plastic limit of the specimen; it is an indicator of how much water the soil particles in the specimen can absorb, and correlates with many engineering properties like permeability, compressibility, shear strength and others. Generally, the clay having high plasticity have lower permeability and also they are also difficult to be compacted.

## Classification of silts and clays

[edit]

According to the Unified Soil Classification System (USCS), silts and clays are classified by plotting the values of their plasticity index and liquid limit on a plasticity chart. The A-Line on the chart separates clays (given the USCS symbol *C*) from silts (given the symbol *M*).  $LL=50\%$  separates high plasticity soils (given the modifier symbol *H*) from low plasticity soils (given the modifier symbol *L*). A soil that plots above the A-line and has  $LL>50\%$  would, for example, be classified as *CH*. Other possible classifications of silts and clays are *ML*, *CL* and *MH*. If the Atterberg limits plot in the "hatched" region on the graph near the origin, the soils are given the dual classification 'CL-ML'.

## Indices related to soil strength

[edit]

### Liquidity index

[edit]

The effects of the water content on the strength of saturated remolded soils can be quantified by the use of the *liquidity index*, *LI*:

$$LI = \frac{w - PL}{LL - PL}$$

Image not found or type unknown

When the LI is 1, remolded soil is at the liquid limit and it has an undrained shear strength of about 2 kPa. When the soil is at the plastic limit, the LI is 0 and the undrained shear strength is about 200 kPa.<sup>[4][11]</sup>

## Relative density

[edit]

The density of sands (cohesionless soils) is often characterized by the relative density,  $\displaystyle D_r$

$$D_r = \frac{e_{\max} - e_{\min}}{e_{\max} - e} \times 100\%$$

Image not found or type unknown


where:  $e_{\max}$  is the "maximum void ratio" corresponding to a very loose state,  $e_{\min}$  is the "minimum void ratio" corresponding to a very dense state and  $e$  is the in-situ void ratio. Methods used to calculate relative density are defined in ASTM D4254-00(2006).<sup>[12]</sup>

Thus if  $D_r = 100\%$  the sand or gravel is very dense, and if  $D_r = 0\%$  the soil is extremely loose and unstable.

## Seepage: steady state flow of water

[edit]

This section is an excerpt from Seepage.[edit]

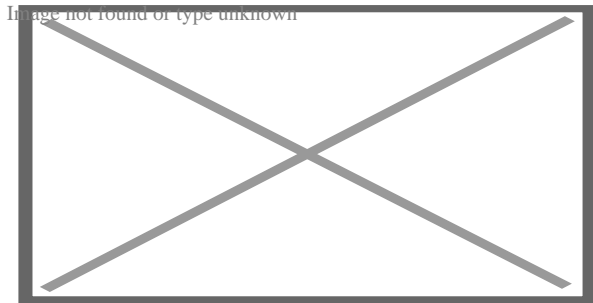


A cross section showing the water table varying with surface topography as well as a perched water table

In soil mechanics, seepage is the movement of water through soil. If fluid pressures in a soil deposit are uniformly increasing with depth according to  $\gamma_w z$  where  $z$  is the depth  $w$  below the water table, then hydrostatic conditions will prevail and the fluids will *not* be flowing through the soil. However, if the water table is sloping or there is a perched water table as indicated in the accompanying sketch, then seepage will occur. For steady state seepage, the seepage velocities are not varying with time. If the water tables are changing levels with time, or if the soil is in the process of consolidation, then steady state conditions do not apply.

## Effective stress and capillarity: hydrostatic conditions

[edit]

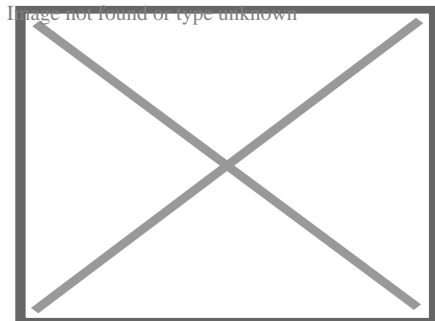

## Spheres immersed in water, reducing effective stress

### Main article: Effective stress

To understand the mechanics of soils it is necessary to understand how normal stresses and shear stresses are shared by the different phases. Neither gas nor liquid provide significant resistance to shear stress. The shear resistance of soil is provided by friction and interlocking of the particles. The friction depends on the intergranular contact stresses between solid particles. The normal stresses, on the other hand, are shared by the fluid and the particles.<sup>[7]</sup> Although the pore air is relatively compressible, and hence takes little normal stress in most geotechnical problems, liquid water is relatively incompressible and if the voids are saturated with water, the pore water must be squeezed out in order to pack the particles closer together.

The principle of effective stress, introduced by Karl Terzaghi, states that the effective stress  $\sigma'$  (i.e., the average intergranular stress between solid particles) may be calculated by a simple subtraction of the pore pressure from the total stress:

$$\sigma' = \sigma - u,$$

where  $\sigma$  is the total stress and  $u$  is the pore pressure. It is not practical to measure  $\sigma'$  directly, so in practice the vertical effective stress is calculated from the pore pressure and vertical total stress. The distinction between the terms pressure and stress is also important. By definition, pressure at a point is equal in all directions but stresses at a point can be different in different directions. In soil mechanics, compressive stresses and pressures are considered to be positive and tensile stresses are considered to be negative, which is different from the solid mechanics sign convention for stress.

### Total stress

[edit]

For level ground conditions, the total vertical stress at a point,  $\sigma_v$ , on average, is the weight of everything above that point per unit area. The vertical stress beneath a uniform surface layer with density  $\rho$  and thickness  $H$  is given by the example

$$\sigma_v = \rho g H = \gamma H$$

where  $g$  is the acceleration due to gravity, and  $\gamma$  is the unit weight of the overlying layer. If there are multiple layers of soil or water above the point of interest, the vertical stress may be calculated by summing the product of the unit weight and thickness of all of the overlying layers. Total stress increases with increasing depth in proportion to the density of the overlying soil.

It is not possible to calculate the horizontal total stress in this way. Lateral earth pressures are addressed elsewhere.


## Pore water pressure

[edit]

Main article: Pore water pressure

## Hydrostatic conditions

[edit]

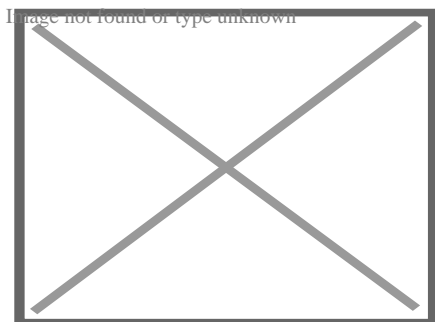

Water is drawn into a small tube by surface tension. Water pressure,  $u$ , is negative above and positive below the free water surface.

If the soil pores are filled with water that is not flowing but is static, the pore water pressures will be hydrostatic. The water table is located at the depth where the water pressure is equal to the atmospheric pressure. For hydrostatic conditions, the water pressure increases linearly with depth below the water table:

$$u = \rho_w g z_w$$

where  $\rho_w$  is the density of water, and  $z_w$  is the depth below the water table.

## Capillary action

[edit]

Due to surface tension, water will rise up in a small capillary tube above a free surface of water. Likewise, water will rise up above the water table into the small pore spaces around the soil particles. In fact the soil may be completely saturated for some distance above the water table. Above the height of capillary saturation, the soil may be wet but the water content will decrease with elevation. If the water in the capillary zone is not moving, the water pressure obeys the equation of hydrostatic equilibrium,  $u = \rho_w g z_w$ , but note that  $z_w$  is negative above the water table. Hence, hydrostatic water pressures are negative above the water table. The thickness of the zone of capillary saturation depends on the pore size, but typically, the heights vary between a centimeter or so for coarse sand to tens of meters for a silt or clay.<sup>[3]</sup> In fact the pore space of soil is a uniform fractal e.g. a set of uniformly distributed D-dimensional fractals of

average linear size  $L$ . For the clay soil it has been found that  $L=0.15$  mm and  $D=2.7$ .<sup>[13]</sup>

The surface tension of water explains why the water does not drain out of a wet sand castle or a moist ball of clay. Negative water pressures make the water stick to the particles and pull the particles to each other, friction at the particle contacts make a sand castle stable. But as soon as a wet sand castle is submerged below a free water surface, the negative pressures are lost and the castle collapses. Considering the effective stress equation,  $\sigma' = \sigma - u$ , if the water pressure is negative, the effective stress may be positive, even on a free surface (a surface where the total normal stress is zero). The negative pore pressure pulls the particles together and causes compressive particle to particle contact forces. Negative pore pressures in clayey soil can be much more powerful than those in sand. Negative pore pressures explain why clay soils shrink when they dry and swell as they are wetted. The swelling and shrinkage can cause major distress, especially to light structures and roads.<sup>[14]</sup>

Later sections of this article address the pore water pressures for seepage and consolidation problems.

### Water at particle contacts

○

Image not found or type unknown

Water at  
particle  
contacts

- Intergranular contact force due to surface tension

Image not found or type unknown

Intergranular  
contact force due  
to surface tension  
Shrinkage caused by drying

○

Image not found or type unknown


Shrinkage caused by  
drying

### Consolidation: transient flow of water

[edit]

Main article: Consolidation (soil)

Image not found or type unknown

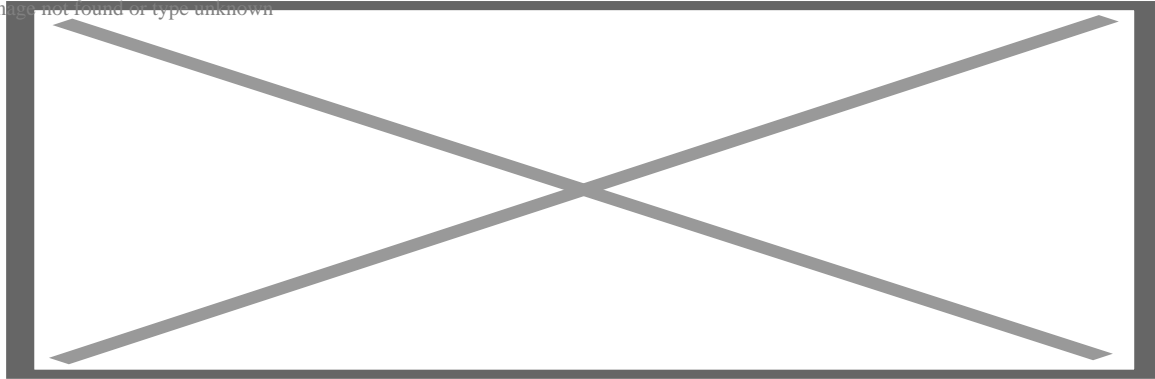

Consolidation analogy. The piston is supported by water underneath and a spring. When a load is applied to the piston, water pressure increases to support the load. As the water slowly leaks through the small hole, the load is transferred from the water pressure to the spring force.


Consolidation is a process by which soils decrease in volume. It occurs when stress is applied to a soil that causes the soil particles to pack together more tightly, therefore reducing volume. When this occurs in a soil that is saturated with water, water will be squeezed out of the soil. The time required to squeeze the water out of a thick deposit of clayey soil layer might be years. For a layer of sand, the water may be squeezed out in a matter of seconds. A building foundation or construction of a new embankment will cause the soil below to consolidate and this will cause settlement which in turn may cause distress to the building or embankment. Karl Terzaghi developed the theory of one-dimensional consolidation which enables prediction of the amount of settlement and the time required for the settlement to occur.<sup>[15]</sup> Afterwards, Maurice Biot fully developed the three-dimensional soil consolidation theory, extending the one-dimensional model previously developed by Terzaghi to more general hypotheses and introducing the set of basic equations of Poroelasticity.<sup>[7]</sup> Soils are tested with an oedometer test to determine their compression index and coefficient of consolidation.

When stress is removed from a consolidated soil, the soil will rebound, drawing water back into the pores and regaining some of the volume it had lost in the consolidation process. If the stress is reapplied, the soil will re-consolidate again along a recompression curve, defined by the recompression index. Soil that has been consolidated to a large pressure and has been subsequently unloaded is considered to be *overconsolidated*. The maximum past vertical effective stress is termed the *preconsolidation stress*. A soil which is currently experiencing the maximum past vertical effective stress is said to be *normally consolidated*. The *overconsolidation ratio*, (OCR) is the ratio of the maximum past vertical effective stress to the current vertical effective stress. The OCR is significant for two reasons: firstly, because the compressibility of normally consolidated soil is significantly larger than that for overconsolidated soil, and secondly, the shear behavior and dilatancy of clayey soil are related to the OCR through critical state soil mechanics; highly overconsolidated clayey soils are dilatant, while normally consolidated soils tend to be contractive.<sup>[2][3][4]</sup>

## Shear behavior: stiffness and strength

[edit]

Main article: shear strength (soil)

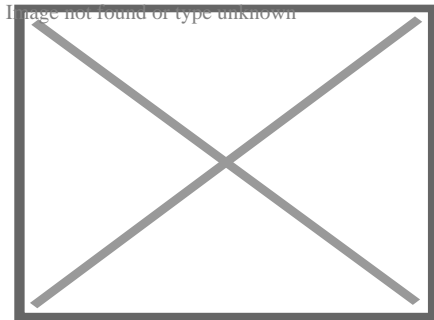


Typical stress strain curve for a drained dilatant soil

The shear strength and stiffness of soil determines whether or not soil will be stable or how much it will deform. Knowledge of the strength is necessary to determine if a slope will be stable, if a building or bridge might settle too far into the ground, and the limiting pressures on a retaining wall. It is important to distinguish between failure of a soil element and the failure of a geotechnical structure (e.g., a building foundation, slope or retaining wall); some soil elements may reach their peak strength prior to failure of the structure. Different criteria can be used to define the "shear strength" and the "yield point" for a soil element from a stress–strain curve. One may define the peak shear strength as the peak of a stress–strain curve, or the shear strength at critical state as the value after large strains when the shear resistance levels off. If the stress–strain curve does not stabilize before the end of shear strength test, the "strength" is sometimes considered to be the shear resistance at 15–20% strain.<sup>[14]</sup> The shear strength of soil depends on many factors including the effective stress and the void ratio.

The shear stiffness is important, for example, for evaluation of the magnitude of deformations of foundations and slopes prior to failure and because it is related to the shear wave velocity. The slope of the initial, nearly linear, portion of a plot of shear stress as a function of shear strain is called the shear modulus

## Friction, interlocking and dilation


[edit]

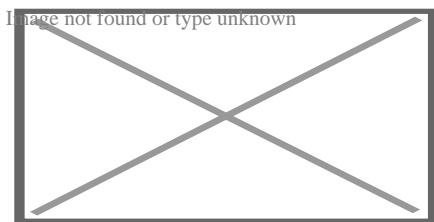

Angle of repose

Soil is an assemblage of particles that have little to no cementation while rock (such as sandstone) may consist of an assembly of particles that are strongly cemented together by chemical bonds. The shear strength of soil is primarily due to interparticle friction and therefore, the shear resistance on a plane is approximately proportional to the effective normal stress on that plane.<sup>[3]</sup> The angle of internal friction is thus closely related to the maximum stable slope angle, often called the angle of repose.

But in addition to friction, soil derives significant shear resistance from interlocking of grains. If the grains are densely packed, the grains tend to spread apart from each other as they are subject to shear strain. The expansion of the particle matrix due to shearing was called dilatancy by Osborne Reynolds.<sup>[11]</sup> If one considers the energy required to shear an assembly of particles there is energy input by the shear force,  $T$ , moving a distance,  $x$  and there is also energy input by the normal force,  $N$ , as the sample expands a distance,  $y$ .<sup>[11]</sup> Due to the extra energy required for the particles to dilate against the confining pressures, dilatant soils have a greater peak strength than contractive soils. Furthermore, as dilative soil grains dilate, they become looser (their void ratio increases), and their rate of dilation decreases until they reach a critical void ratio. Contractive soils become denser as they shear, and their rate of contraction decreases until they reach a critical void ratio.

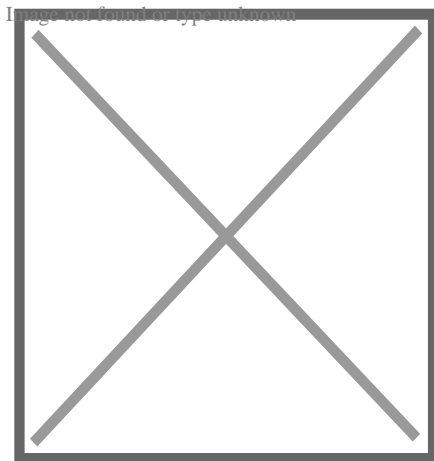

A critical state line separates the dilatant and contractive states for soil.

The tendency for a soil to dilate or contract depends primarily on the confining pressure and the void ratio of the soil. The rate of dilation is high if the confining pressure is small and the void ratio is small. The rate of contraction is high if the confining pressure is large and the void ratio is large. As a first approximation, the regions of contraction and dilation are separated by the critical state line.

## Failure criteria

[edit]

After a soil reaches the critical state, it is no longer contracting or dilating and the shear stress on the failure plane  $\tau$  is determined by the effective normal stress on the failure plane  $\sigma'$ .



and critical state friction angle  $\phi_{crit}$

$$\tau_{crit} = \sigma'_n \tan \phi_{crit}$$

The peak strength of the soil may be greater, however, due to the interlocking (dilatancy) contribution. This may be stated:

$$\tau_{peak} = \sigma'_n \tan \phi_{peak}$$

where  $\phi_{peak} > \phi_{crit}$ . However, use of a friction angle greater than the critical state value for design requires care. The peak strength will not be mobilized everywhere at the same time in a practical problem such as a foundation, slope or retaining wall. The critical state friction angle is not nearly as variable as the peak friction angle and hence it can be relied upon with confidence.<sup>[3][4][11]</sup>

Not recognizing the significance of dilatancy, Coulomb proposed that the shear strength of soil may be expressed as a combination of adhesion and friction components:<sup>[11]</sup>

$$\tau_f = c' + \sigma'_f \tan \phi'$$

It is now known that the  $\phi'$  and  $c'$  parameters in the last equation are not fundamental soil properties.<sup>[3][6][11][16]</sup> In particular,  $\phi'$  and  $c'$  are different depending on the magnitude of effective stress.<sup>[6][16]</sup> According to Schofield (2006),<sup>[11]</sup> the longstanding use of  $c'$  has led many engineers to wrongly believe that  $c'$  is a fundamental parameter. This assumption that  $\phi'$  and  $c'$  are constant can lead to overestimation of peak strengths.<sup>[3][16]</sup>


## Structure, fabric, and chemistry

[edit]

In addition to the friction and interlocking (dilatancy) components of strength, the structure and fabric also play a significant role in the soil behavior. The structure and fabric include factors such as the spacing and arrangement of the solid particles or the amount and spatial distribution of pore water; in some cases cementitious material accumulates at particle-particle contacts. Mechanical behavior of soil is affected by the density of the particles and their structure or arrangement of the particles as well as the amount and spatial distribution of fluids present (e.g., water and air voids). Other factors include the electrical charge of the particles, chemistry of pore water, chemical bonds (i.e. cementation -particles connected through a solid substance such as recrystallized calcium carbonate) <sup>[1][16]</sup>

## Drained and undrained shear

[edit]

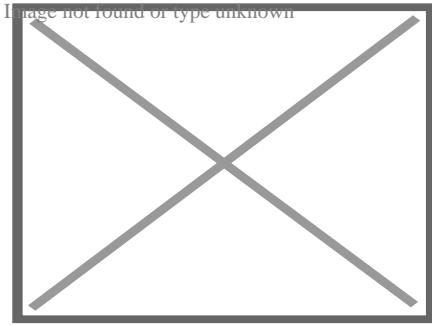

Moist sand along the shoreline is originally densely packed by the draining water. Foot pressure on the sand causes it to dilate (see: *Reynolds dilatancy*), drawing water from the surface into the pores.

The presence of nearly incompressible fluids such as water in the pore spaces affects the ability for the pores to dilate or contract.

If the pores are saturated with water, water must be sucked into the dilating pore spaces to fill the expanding pores (this phenomenon is visible at the beach when apparently dry spots form around feet that press into the wet sand). *[clarification needed]*

Similarly, for contractive soil, water must be squeezed out of the pore spaces to allow contraction to take place.

Dilation of the voids causes negative water pressures that draw fluid into the pores, and contraction of the voids causes positive pore pressures to push the water out of the pores. If the rate of shearing is very large compared to the rate that water can be sucked into or squeezed out of the dilating or contracting pore spaces, then the shearing is called *undrained shear*, if the shearing is slow enough that the water pressures are negligible, the shearing is called *drained shear*. During undrained shear, the water pressure  $u$  changes depending on volume change tendencies. From the effective stress equation, the change in  $u$  directly effects the effective stress by the equation:

$$\sigma' = \sigma - u,$$

and the strength is very sensitive to the effective stress. It follows then that the undrained shear strength of a soil may be smaller or larger than the drained shear strength depending upon whether the soil is contractive or dilative.

## Shear tests

[edit]

Strength parameters can be measured in the laboratory using direct shear test, triaxial shear test, simple shear test, fall cone test and (hand) shear vane test; there are numerous other devices and variations on these devices used in practice today. Tests conducted to characterize the strength and stiffness of the soils in the ground include the Cone penetration test and the

Standard penetration test.

## Other factors

[edit]

The stress–strain relationship of soils, and therefore the shearing strength, is affected by:<sup>[17]</sup>

1. *soil composition* (basic soil material): mineralogy, grain size and grain size distribution, shape of particles, pore fluid type and content, ions on grain and in pore fluid.
2. *state* (initial): Defined by the initial void ratio, effective normal stress and shear stress (stress history). State can be described by terms such as: loose, dense, overconsolidated, normally consolidated, stiff, soft, contractive, dilative, etc.
3. *structure*: Refers to the arrangement of particles within the soil mass; the manner in which the particles are packed or distributed. Features such as layers, joints, fissures, slickensides, voids, pockets, cementation, etc., are part of the structure. Structure of soils is described by terms such as: undisturbed, disturbed, remolded, compacted, cemented; flocculent, honey-combed, single-grained; flocculated, deflocculated; stratified, layered, laminated; isotropic and anisotropic.
4. *Loading conditions*: Effective stress path - drained, undrained, and type of loading - magnitude, rate (static, dynamic), and time history (monotonic, cyclic).

## Applications

[edit]

### Lateral earth pressure

[edit]

Main article: Lateral earth pressure

Lateral earth stress theory is used to estimate the amount of stress soil can exert perpendicular to gravity. This is the stress exerted on retaining walls. A lateral earth stress coefficient,  $K$ , is defined as the ratio of lateral (horizontal) effective stress to vertical effective stress for cohesionless soils ( $K = \sigma'_h / \sigma'_v$ ). There are three coefficients: at-rest, active, and passive. At-rest stress is the lateral stress in the ground before any disturbance takes place. The active stress state is reached when a wall moves away from the soil under the influence of lateral stress, and results from shear failure due to reduction of lateral stress. The passive stress state is reached when a wall is pushed into the soil far enough to cause shear failure within the mass due to increase of lateral stress. There are many theories for estimating lateral earth stress; some are empirically based, and some are analytically derived.

### Bearing capacity


[edit]

Main article: Bearing capacity

The bearing capacity of soil is the average contact stress between a foundation and the soil which will cause shear failure in the soil. Allowable bearing stress is the bearing capacity divided by a factor of safety. Sometimes, on soft soil sites, large settlements may occur under loaded foundations without actual shear failure occurring; in such cases, the allowable bearing stress is determined with regard to the maximum allowable settlement. It is important during construction and design stage of a project to evaluate the subgrade strength. The California Bearing Ratio (CBR) test is commonly used to determine the suitability of a soil as a subgrade for design and construction. The field Plate Load Test is commonly used to predict the deformations and failure characteristics of the soil/subgrade and modulus of subgrade reaction ( $k_s$ ). The Modulus of subgrade reaction ( $k_s$ ) is used in foundation design, soil-structure interaction studies and design of highway pavements.<sup>[*citation needed*]</sup>

## Slope stability

[edit]

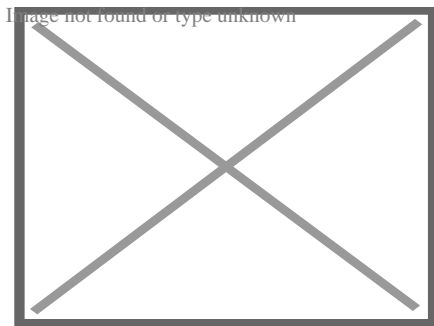

Simple slope slip section

Main article: Slope stability

The field of slope stability encompasses the analysis of static and dynamic stability of slopes of earth and rock-fill dams, slopes of other types of embankments, excavated slopes, and natural slopes in soil and soft rock.<sup>[18]</sup>

As seen to the right, earthen slopes can develop a cut-spherical weakness zone. The probability of this happening can be calculated in advance using a simple 2-D circular analysis package.<sup>[19]</sup> A primary difficulty with analysis is locating the most-probable slip plane for any given situation.<sup>[20]</sup> Many landslides have been analyzed only after the fact. Landslides vs. Rock strength are two factors for consideration.

## Recent developments

[edit]

A recent finding in soil mechanics is that soil deformation can be described as the behavior of a dynamical system. This approach to soil mechanics is referred to as Dynamical Systems based Soil Mechanics (DSSM). DSSM holds simply that soil deformation is a Poisson process in which particles move to their final position at random shear strains.

The basis of DSSM is that soils (including sands) can be sheared till they reach a steady-state condition at which, under conditions of constant strain-rate, there is no change in shear stress, effective confining stress, and void ratio. The steady-state was formally defined<sup>[21]</sup> by Steve J. Poulos Archived 2020-10-17 at the Wayback Machine an associate professor at the Soil Mechanics Department of Harvard University, who built off a hypothesis that Arthur Casagrande was formulating towards the end of his career. The steady state condition is not the same as the "critical state" condition. It differs from the critical state in that it specifies a statistically constant structure at the steady state. The steady-state values are also very slightly dependent on the strain-rate.

Many systems in nature reach steady states, and dynamical systems theory describes such systems. Soil shear can also be described as a dynamical system.<sup>[22][23]</sup> The physical basis of the soil shear dynamical system is a Poisson process in which particles move to the steady-state at random shear strains.<sup>[24]</sup> Joseph<sup>[25]</sup> generalized this—particles move to their final position (not just steady-state) at random shear-strains. Because of its origins in the steady state concept, DSSM is sometimes informally called "Harvard soil mechanics."

DSSM provides for very close fits to stress–strain curves, including for sands. Because it tracks conditions on the failure plane, it also provides close fits for the post failure region of sensitive clays and silts something that other theories are not able to do. Additionally DSSM explains key relationships in soil mechanics that to date have simply been taken for granted, for example, why normalized undrained peak shear strengths vary with the log of the overconsolidation ratio and why stress–strain curves normalize with the initial effective confining stress; and why in one-dimensional consolidation the void ratio must vary with the log of the effective vertical stress, why the end-of-primary curve is unique for static load increments, and why the ratio of the creep value  $C_\psi$  to the compression index  $C_c$  must be approximately constant for a wide range of soils.<sup>[26]</sup>

## See also

[edit]

- Critical state soil mechanics
- Earthquake engineering
- Engineering geology
- Geotechnical centrifuge modeling
- Geotechnical engineering
- Geotechnical engineering (Offshore)
- Geotechnics
- Hydrogeology, aquifer characteristics closely related to soil characteristics

- International Society for Soil Mechanics and Geotechnical Engineering
- Rock mechanics
- Slope stability analysis

## References

[edit]

1. ^ **a b c d e f g h** Mitchell, J.K., and Soga, K. (2005) Fundamentals of soil behavior, Third edition, John Wiley and Sons, Inc., ISBN 978-0-471-46302-3
2. ^ **a b c d e f** Santamarina, J.C., Klein, K.A., & Fam, M.A. (2001). *Soils and Waves: Particulate Materials Behavior, Characterization and Process Monitoring*. Wiley. ISBN 978-0-471-49058-6.cite book: CS1 maint: multiple names: authors list (link).
3. ^ **a b c d e f g h i j k l** Powrie, W., Spon Press, 2004, *Soil Mechanics – 2nd ed* ISBN 0-415-31156-X
4. ^ **a b c d e f** A Guide to Soil Mechanics, Bolton, Malcolm, Macmillan Press, 1979. ISBN 0-333-18931-0
5. ^ "Built Environment – Routledge". *Routledge.com*. Retrieved 2017-01-14.
6. ^ **a b c d e** Lambe, T. William & Robert V. Whitman. *Soil Mechanics*. Wiley, 1991; p. 29. ISBN 978-0-471-51192-2
7. ^ **a b c d** Guerriero V., Mazzoli S. (2021). "Theory of Effective Stress in Soil and Rock and Implications for Fracturing Processes: A Review". *Geosciences*. **11** (3): 119. Bibcode:2021Geosc..11..119G. doi:10.3390/geosciences11030119.
8. ^ ASTM Standard Test Methods of Particle-Size Distribution (Gradation) of Soils using Sieve Analysis. <http://www.astm.org/Standards/D6913.htm> Archived 2011-08-10 at the Wayback Machine
9. ^ "Classification of Soils for Engineering Purposes: Annual Book of ASTM Standards". *D 2487-83*. **04** (8). American Society for Testing and Materials. 1985: 395–408. Archived from the original on 2010-09-14. Retrieved 2010-08-31. cite journal: Cite journal requires |journal= (help)
10. ^ **a b** Wood, David Muir, Soil Behavior and Critical State Soil Mechanics, Cambridge University Press, 1990, ISBN 0-521-33249-4
11. ^ **a b c d e f g** Disturbed soil properties and geotechnical design, Schofield, Andrew N., Thomas Telford, 2006. ISBN 0-7277-2982-9
12. ^ ASTM Standard Test Methods for Minimum Index Density and Unit Weight of Soils and Calculation of Relative Density. <http://www.astm.org/Standards/D4254.htm> Archived 2011-09-07 at the Wayback Machine
13. ^ Ozhovan, M.I.; Dmitriev, I.E.; Batyukhnova, O.G. (1993). "Fractal structure of pores in clay soil". *Atomic Energy*. **74** (3): 241–243. doi:10.1007/BF00739059. S2CID 95352427.
14. ^ **a b** Holtz, R.D, and Kovacs, W.D., 1981. An Introduction to Geotechnical Engineering. Prentice-Hall, Inc. page 448
15. ^ Terzaghi, K., 1943, *Theoretical Soil Mechanics*, John Wiley and Sons, New York
16. ^ **a b c d** Terzaghi, K., Peck, R.B., Mesri, G. (1996) Soil mechanics in Engineering Practice, Third Edition, John Wiley & Sons, Inc., ISBN 0-471-08658-4

17. ^ Poulos, S. J. 1989. Advance Dam Engineering for Design, Construction, and Rehabilitation: Liquefaction Related Phenomena. Ed. Jansen, R.B, Van Nostrand Reinhold, pages 292–297.
18. ^ *Slope Stability (PDF). Engineer Manual. Vol. EM 1110-2-1902. United States Army Corps of Engineers. 3 Oct 2003. Archived (PDF) from the original on 2016-12-29. Retrieved 2017-01-18.*
19. ^ "Slope Stability Calculator". Retrieved 2006-12-14.
20. ^ Chugh, A.K. (2002). "A method for locating critical slip surfaces in slope stability analysis: Discussion". *Canadian Geotechnical Journal*. **39** (3): 765–770. doi:10.1139/t02-042.
21. ^ Poulos, Steve J. (1981). "The Steady State of Deformation". *Journal of Geotechnical Engineering*. **107** (GT5): 553–562.
22. ^ Joseph, Paul G. (2009). "Constitutive Model of Soil Based on a Dynamical Systems Approach". *Journal of Geotechnical and Geoenvironmental Engineering*. **135** (8): 1155–1158. doi:10.1061/(asce)gt.1943-5606.0000001.
23. ^ Joseph, Paul G. (2010). "A Dynamical Systems Based Approach to Soil Shear". *Géotechnique*. **LX** (10): 807–812. Bibcode:2010Getq...60..807J. doi:10.1680/geot.9.p.001.
24. ^ Joseph, Paul G. (2012). "Physical Basis and Validation of a Constitutive Model for Soil Shear Derived from Micro-Structural Changes". *International Journal of Geomechanics*. **13** (4): 365–383. doi:10.1061/(asce)gm.1943-5622.0000209.
25. ^ Joseph, Paul G. (2014). "Generalised dynamical systems soil deformation model". *Geotechnical Research*. **1** (1): 32–42. Bibcode:2014GeotR...1...32J. doi:10.1680/geores.14.00004.
26. ^ Joseph, Paul G. (2017). *Dynamical Systems-Based Soil Mechanics (first ed.)*. CRC Press/Balkema. p. 138. ISBN 9781138723221. Archived from the original on 2018-03-24. Retrieved 2017-05-14.

## External links

[edit]

-  Media related to Soil mechanics at Wikimedia Commons


- v
- t
- e

Soil science

- History
- Index

## Main fields

- Pedology
- Edaphology
- Soil biology
- Soil microbiology
- Soil zoology
- Soil ecology
- Soil physics
- Soil mechanics
- Soil chemistry
- Environmental soil science
- Agricultural soil science





## **Soil topics**

- Soil
- Pedosphere
  - Soil morphology
  - Pedodiversity
  - Soil formation
- Soil erosion
- Soil contamination
- Soil retrogression and degradation
- Soil compaction
  - Soil compaction (agriculture)
- Soil sealing
- Soil salinity
  - Alkali soil
- Soil pH
  - Soil acidification
- Soil health
- Soil life
- Soil biodiversity
- Soil quality
- Soil value
- Soil fertility
- Soil resilience
- Soil color
- Soil texture
- Soil structure
  - Pore space in soil
  - Pore water pressure
- Soil crust
- Soil horizon
- Soil biomantle
- Soil carbon
- Soil gas
  - Soil respiration
- Soil organic matter
- Soil moisture
  - Soil water (retention)

- **v**
- **t**
- **e**

## Soil classification

### World Reference Base for Soil Resources (1998–)

- Acrisols
- Alisols
- Andosols
- Anthrosols
- Arenosols
- Calcisols
- Cambisols
- Chernozem
- Cryosols
- Durisols
- Ferralsols
- Fluvisols
- Gleysols
- Gypsisols
- Histosol
- Kastanozems
- Leptosols
- Lixisols
- Luvisols
- Nitisols
- Phaeozems
- Planosols
- Plinthosols
- Podzols
- Regosols
- Retisols
- Solonchaks
- Solonetz
- Stagnosol
- Technosols
- Umbrisols
- Vertisols

### USDA soil taxonomy

- Alfisols
- Andisols
- Aridisols
- Entisols
- Gelisols
- Histosols
- Inceptisols

## **Applications**

- Soil conservation
- Soil management
- Soil guideline value
- Soil survey
- Soil test
- Soil governance
- Soil value
- Soil salinity control
- Erosion control
- Agroecology
- Liming (soil)

## **Related fields**

- Geology
- Geochemistry
- Petrology
- Geomorphology
- Geotechnical engineering
- Hydrology
- Hydrogeology
- Biogeography
- Earth materials
- Archaeology
- Agricultural science
  - Agrology

## **Societies, Initiatives**



- Australian Society of Soil Science Incorporated
- Canadian Society of Soil Science
- Central Soil Salinity Research Institute (India)
- German Soil Science Society
- Indian Institute of Soil Science
- International Union of Soil Sciences
- International Year of Soil
- National Society of Consulting Soil Scientists (US)
- OPAL Soil Centre (UK)
- Soil Science Society of Poland
- Soil and Water Conservation Society (US)
- Soil Science Society of America
- World Congress of Soil Science

## Scientific journals

- *Acta Agriculturae Scandinavica B*
- *Journal of Soil and Water Conservation*
- *Plant and Soil*
- *Pochvovedenie*
- *Soil Research*
- *Soil Science Society of America Journal*

## See also

- Land use
- Land conversion
- Land management
- Vegetation
- Infiltration (hydrology)
- Groundwater
- Crust (geology)
- Impervious surface/Surface runoff
- Petrichor

-  [Wikipedia:WikiProject Soil](#)
-  [Category soil](#)
- [Category soil science](#)
-  [List of soil scientists](#)





















- **v**
- **t**
- **e**

Geotechnical engineering

Offshore geotechnical engineering

## Investigation and instrumentation

### Field (*in situ*)

-  Core drill
-  Cone penetration test
-  Geo-electrical sounding
-  Permeability test
-  Load test
  - Static
  - Dynamic
  - Statnamic
-  Pore pressure measurement
  - Piezometer
  - Well
-  Ram sounding
-  Rock control drilling
-  Rotary-pressure sounding
-  Rotary weight sounding
-  Sample series
-  Screw plate test
- Deformation monitoring
  -  Incliner
  -  Settlement recordings
-  Shear vane test
-  Simple sounding
-  Standard penetration test
-  Total sounding
-  Trial pit
-  Visible bedrock
- Nuclear densometer test
- Exploration geophysics
- Crosshole sonic logging

## Soil

### Types

- Clay
- Silt
- Sand
- Gravel
- Peat
- Loam
- Loess

### Properties

- Hydraulic conductivity
- Water content
- Void ratio
- Bulk density
- Thixotropy
- Reynolds' dilatancy
- Angle of repose
- Friction angle
- Cohesion
- Porosity
- Permeability
- Specific storage
- Shear strength
- Sensitivity

**Structures  
(Interaction)**

Natural features

- Topography
- Vegetation
- Terrain
- Topsoil
- Water table
- Bedrock
- Subgrade
- Subsoil

Earthworks

- Shoring structures
  - Retaining walls
  - Gabion
  - Ground freezing
  - Mechanically stabilized earth
  - Pressure grouting
  - Slurry wall
  - Soil nailing
  - Tieback
- Land development
- Landfill
- Excavation
- Trench
- Embankment
- Cut
- Causeway
- Terracing
- Cut-and-cover
- Cut and fill
- Fill dirt
- Grading
- Land reclamation
- Track bed
- Erosion control
- Earth structure
- Expanded clay aggregate
- Crushed stone
- Geosynthetics
  - Geotextile
  - Geomembrane
  - Geosynthetic clay liner
  - Cellular confinement
- Infiltration

Foundations

- Shallow
- Deep

## Forces

- Effective stress
- Pore water pressure
- Lateral earth pressure
- Overburden pressure
- Preconsolidation pressure

## Mechanics

### Phenomena/ problems

- Permafrost
- Frost heaving
- Consolidation
- Compaction
- Earthquake
  - Response spectrum
  - Seismic hazard
  - Shear wave
- Landslide analysis
  - Stability analysis
  - Mitigation
  - Classification
  - Sliding criterion
  - Slab stabilisation
- Bearing capacity \* Stress distribution in soil

## Numerical analysis software

- SEEP2D
- STABL
- SVFlux
- SVSlope
- UTEXAS
- Plaxis



## Related fields

- Geology
- Geochemistry
- Petrology
- Earthquake engineering
- Geomorphology
- Soil science
- Hydrology
- Hydrogeology
- Biogeography
- Earth materials
- Archaeology
- Agricultural science
  - Agrology


Authority control databases: National  [Edit this at Wikidata](#)

- Germany
- United States
- France
- Japan
- Czech Republic
- Israel

## About building code

The examples and perspective in this article **may not represent a worldwide view of the subject**. You may improve this article, discuss the issue on the talk page, or create a new article as appropriate. *(November 2021) (Learn how and when to remove this message)*

Not to be confused with Zoning laws.

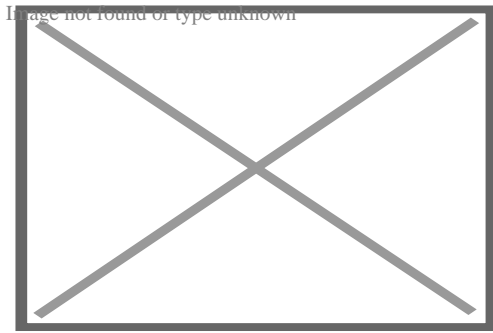

Code Violation: This fire-rated concrete block wall is penetrated by cable trays and electrical cables. The hole should be firestopped to restore the fire-resistance rating of the wall. Instead, it is filled with flammable polyurethane foam.

A **building code** (also **building control** or **building regulations**) is a set of rules that specify the standards for construction objects such as buildings and non-building structures. Buildings must conform to the code to obtain planning permission, usually from a local council. The main purpose of building codes is to protect public health, safety and general welfare as they relate to the construction and occupancy of buildings and structures—*for example*, the building codes in many countries require engineers to consider the effects of soil liquefaction in the design of new buildings.<sup>[1]</sup> The building code becomes law of a particular jurisdiction when formally enacted by the appropriate governmental or private authority.<sup>[2]</sup>

Building codes are generally intended to be applied by architects, engineers, interior designers, constructors and regulators but are also used for various purposes by safety inspectors, environmental scientists, real estate developers, subcontractors, manufacturers of building products and materials, insurance companies, facility managers, tenants, and others. Codes regulate the design and construction of structures where adopted into law.

Examples of building codes began in ancient times.<sup>[3]</sup> In the USA the main codes are the International Building Code or International Residential Code [IBC/IRC], electrical codes and plumbing, mechanical codes. Fifty states and the District of Columbia have adopted the I-Codes at the state or jurisdictional level.<sup>[4]</sup> In Canada, national model codes are published by the National Research Council of Canada.<sup>[5]</sup> In the United Kingdom, compliance with Building Regulations is monitored by building control bodies, either Approved Inspectors or Local Authority Building Control departments. Building Control regularisation charges apply in case work is undertaken which should have had been inspected at the time of the work if this was not done.<sup>[6]</sup>

## Types

[edit]

The practice of developing, approving, and enforcing building codes varies considerably among nations. In some countries building codes are developed by the government agencies or quasi-governmental standards organizations and then enforced across the country by the central government. Such codes are known as the **national building codes** (in a sense they enjoy a

mandatory nationwide application).

In other countries, where the power of regulating construction and fire safety is vested in local authorities, a system of model building codes is used. Model building codes have no legal status unless adopted or adapted by an authority having jurisdiction. The developers of model codes urge public authorities to reference model codes in their laws, ordinances, regulations, and administrative orders. When referenced in any of these legal instruments, a particular model code becomes law. This practice is known as 'adoption by reference'. When an adopting authority decides to delete, add, or revise any portions of the model code adopted, it is usually required by the model code developer to follow a formal adoption procedure in which those modifications can be documented for legal purposes.

There are instances when some local jurisdictions choose to develop their own building codes. At some point in time all major cities in the United States had their own building codes. However, due to ever increasing complexity and cost of developing building regulations, virtually all municipalities in the country have chosen to adopt model codes instead. For example, in 2008 New York City abandoned its proprietary *1968 New York City Building Code* in favor of a customized version of the International Building Code.<sup>[7]</sup> The City of Chicago remains the only municipality in America that continues to use a building code the city developed on its own as part of the *Municipal Code of Chicago*.

In Europe, the Eurocode: Basis of structural design, is a pan-European building code that has superseded the older national building codes. Each country now has National Annexes to localize the contents of the Eurocodes.

Similarly, in India, each municipality and urban development authority has its own building code, which is mandatory for all construction within their jurisdiction. All these local building codes are variants of a National Building Code,<sup>[8]</sup> which serves as model code providing guidelines for regulating building construction activity.

## Scope

[edit]



This section **needs additional citations for verification**. Please help improve this article by adding citations to reliable sources in this section. Unsourced material may be challenged and removed. (October 2016) (*Learn how and when to remove this message*)

The purpose of building codes is to provide minimum standards for safety, health, and general welfare including structural integrity, mechanical integrity (including sanitation, water supply, light, and ventilation), means of egress, fire prevention and control, and energy conservation.<sup>[9]</sup><sup>[10]</sup> Building codes generally include:

- Standards for structure, placement, size, usage, wall assemblies, fenestration size/locations, egress rules, size/location of rooms, foundations, floor assemblies, roof structures/assemblies, energy efficiency, stairs and halls, mechanical, electrical, plumbing, site drainage & storage, appliance, lighting, fixtures standards, occupancy rules, and swimming pool regulations
- Rules regarding parking and traffic impact
- Fire code rules to minimize the risk of a fire and to ensure safe evacuation in the event of such an emergency<sup>[citation needed]</sup>
- Requirements for earthquake (seismic code), hurricane, flood, and tsunami resistance, especially in disaster prone areas or for very large buildings where a failure would be catastrophic<sup>[citation needed]</sup>
- Requirements for specific building uses (for example, storage of flammable substances, or housing a large number of people)
- Energy provisions and consumption
- Grandfather clauses: Unless the building is being renovated, the building code usually does not apply to existing buildings.
- Specifications on components
- Allowable installation methodologies
- Minimum and maximum room ceiling heights, exit sizes and location
- Qualification of individuals or corporations doing the work
- For high structures, anti-collision markers for the benefit of aircraft

Building codes are generally separate from zoning ordinances, but exterior restrictions (such as setbacks) may fall into either category.

Designers use building code standards out of substantial reference books during design. Building departments review plans submitted to them before construction, issue permits [or not] and inspectors verify compliance to these standards at the site during construction.

There are often additional codes or sections of the same building code that have more specific requirements that apply to dwellings or places of business and special construction objects such as canopies, signs, pedestrian walkways, parking lots, and radio and television antennas.

## Criticism

[edit]

Building codes have been criticized for contributing to housing crisis and increasing the cost of new housing to some extent, including through conflicting code between different administrators.<sup>[11]</sup> Proposed improvements include regular review and cost-benefit analysis of building codes,<sup>[12]</sup> promotion of low-cost construction materials and building codes suitable to mass production,<sup>[11]</sup> reducing bureaucracy, and promoting transparency.<sup>[13]</sup>

## History

[edit]

## Antiquity

[edit]

Building codes have a long history. The earliest known written building code is included in the Code of Hammurabi,<sup>[3]</sup> which dates from circa 1772 BC.

The book of Deuteronomy in the Hebrew Bible stipulated that parapets must be constructed on all houses to prevent people from falling off.<sup>[14]</sup>

In the Chinese book of rites it mentions that ancestral temples and houses should be a certain standard length in ancient China they measured land in the chu or well field system so it was important to be precise though most of the actual lengths are lost or obscure.<sup>[15][16]</sup>

In ancient Japan a certain official destroyed a courtiers house because the size was above his rank.<sup>[17]</sup>

## Modern era

[edit]

### France

[edit]

In Paris, under the reconstruction of much of the city under the Second Empire (1852–70), great blocks of apartments were erected<sup>[18]</sup> and the height of buildings was limited by law to five or six stories at most.

### United Kingdom

[edit]

After the Great Fire of London in 1666, which had been able to spread so rapidly through the densely built timber housing of the city, the Rebuilding of London Act 1666 was passed in the same year as the first significant building regulation.<sup>[19]</sup> Drawn up by Sir Matthew Hale, the act regulated the rebuilding of the city, required housing to have some fire resistance capacity and authorised the City of London Corporation to reopen and widen roads.<sup>[20]</sup> The Laws of the Indies were passed in the 1680s by the Spanish Crown to regulate the urban planning for colonies throughout Spain's worldwide imperial possessions.

The first systematic national building standard was established with the Metropolitan Buildings Act 1844. Among the provisions, builders were required to give the district surveyor two days' notice before building, regulations regarding the thickness of walls, height of rooms, the materials used in repairs, the dividing of existing buildings and the placing and design of chimneys, fireplaces and drains were to be enforced and streets had to be built to minimum requirements.<sup>[21]</sup>

The Metropolitan Buildings Office was formed to regulate the construction and use of buildings throughout London. Surveyors were empowered to enforce building regulations, which sought to improve the standard of houses and business premises, and to regulate activities that might threaten public health. In 1855 the assets, powers and responsibilities of the office passed to the Metropolitan Board of Works.

## **United States**

[edit]

The City of Baltimore passed its first building code in 1891.<sup>[22]</sup> The Great Baltimore Fire occurred in February 1904. Subsequent changes were made that matched other cities.<sup>[23]</sup> In 1904, a Handbook of the Baltimore City Building Laws was published. It served as the building code for four years. Very soon, a formal building code was drafted and eventually adopted in 1908.

The structural failure of the tank that caused the Great Molasses Flood of 1919 prompted the Boston Building Department to require engineering and architectural calculations be filed and signed. U.S. cities and states soon began requiring sign-off by registered professional engineers for the plans of major buildings.<sup>[24]</sup>

More recently, the 2015 Berkeley balcony collapse has prompted updates to California's balcony building codes, set for 2025, which include stricter material requirements, enhanced load-bearing standards, and mandatory inspections which known as SB326 and SB721.<sup>[25]</sup> These laws mandate regular inspections every six years for multifamily buildings. Property owners and HOAs are required to address any structural or waterproofing issues identified during inspections to ensure compliance and safety. Failure to comply can result in fines, increased liability, and legal consequences. The updates aim to prevent tragedies like the Berkeley collapse, which was caused by dry rot and structural failure, by ensuring the long-term safety and durability of elevated structures.<sup>[26]</sup>

## **Energy codes**

[edit]

The current energy codes<sup>[*clarification needed*]</sup> of the United States are adopted at the state and municipal levels and are based on the International Energy Conservation Code (IECC). Previously, they were based on the Model Energy Code (MEC). As of March 2017, the following residential codes have been partially or fully adopted by states:<sup>[27]</sup>

- 2015 IECC or equivalent (California, Illinois, Maryland, Massachusetts, Michigan, Pennsylvania, New Jersey, New York, Vermont, Washington)
- 2012 IECC or equivalent (Alabama, Connecticut, Delaware, District of Columbia, Florida, Iowa, Minnesota, Nevada, Rhode Island, Texas)
- 2009 IECC or equivalent (Arkansas, Georgia, Idaho, Indiana, Kentucky, Louisiana, Montana, Nebraska, New Hampshire, New Mexico, North Carolina, Ohio, Oklahoma, Oregon, South Carolina, Tennessee, Virginia, West Virginia, Wisconsin)
- 2006 IECC or equivalent (Utah)
- 2006 IECC or no statewide code (Alaska, Arizona, Colorado, Kansas, Maine, Mississippi, Missouri, North Dakota, South Dakota, Wyoming)

## Australia

[edit]

Australia uses the National Construction Code.

## See also

[edit]

- Building officials
- Construction law
- Earthquake-resistant structures
- Energy Efficiency and Conservation Block Grants
- Outline of construction
- Seismic code
- Uniform Mechanical Code
- Variance (land use) – permission to vary zoning and sometimes building to code

## References

[edit]

1. <sup>^</sup> CEN (2004). *EN1998-5:2004 Eurocode 8: Design of structures for earthquake resistance, part 5: Foundations, retaining structures and geotechnical aspects*. Brussels: European Committee for Standardization.
2. <sup>^</sup> Ching, Francis D. K.; Winkel, Steven R. (22 March 2016). *Building Codes Illustrated: A Guide to Understanding the 2015 International Building Code*. John Wiley & Sons. ISBN

978-1-119-15095-4.

3. ^ **a b** "Hammurabi's Code of Laws". [eawc.evansville.edu](http://eawc.evansville.edu). Archived from the original on 9 May 2008. Retrieved 24 May 2008.
4. ^ "About ICC". [www.iccsafe.org](http://www.iccsafe.org). Retrieved 8 December 2013.
5. ^ Canada, Government of Canada. National Research Council. "Codes Canada - National Research Council Canada". [www.nrc-cnrc.gc.ca](http://www.nrc-cnrc.gc.ca). Retrieved 1 April 2018.
6. ^ Northampton Borough Council, Building Control - regularisation charges [www.northampton.gov.uk](http://www.northampton.gov.uk) Archived 11 May 2021 at the Wayback Machine, accessed 15 March 2021
7. ^ NYC Construction Codes [www.nyc.gov](http://www.nyc.gov) Archived 2 July 2006 at the Wayback Machine
8. ^ National Building Code [www.bis.org.in](http://www.bis.org.in)
9. ^ Hageman, Jack M., and Brian E. P. Beeston. *Contractor's guide to the building code*. 6th ed. Carlsbad, CA: Craftsman Book Co., 2008. 10. Print.
10. ^ Wexler, Harry J., and Richard Peck. *Housing and local government: a research guide for policy makers and planners*. Lexington, Mass. u.a.: Lexington Books, 1974. 53. Print.
11. ^ **a b** Listokin, David; Hattis, David B. (2005). "Building Codes and Housing". *Cityscape*. **8** (1). US Department of Housing and Urban Development: 21–67. ISSN 1936-007X. JSTOR 20868571. Retrieved 25 July 2024.
12. ^ Nwadike, Amarachukwu Nnadozie; Wilkinson, Suzanne (3 February 2022). "Why amending building codes? An investigation of the benefits of regular building code amendment in New Zealand". *International Journal of Building Pathology and Adaptation*. **40** (1): 76–100. doi:10.1108/IJBPA-08-2020-0068. ISSN 2398-4708.
13. ^ Nwadike, Amarachukwu; Wilkinson, Suzanne (2021). "Promoting Performance-Based Building Code Compliance in New Zealand". *Journal of Performance of Constructed Facilities*. **35** (4). doi:10.1061/(ASCE)CF.1943-5509.0001603. ISSN 0887-3828.
14. ^ Deuteronomy 22:8
15. ^ *Confucius* (29 August 2016). *Delphi Collected Works of Confucius - Four Books and Five Classics of Confucianism (Illustrated)*. Delphi Classics. ISBN 978-1-78656-052-0.
16. ^ *Mencius* (28 October 2004). *Mencius*. Penguin UK. ISBN 978-0-14-190268-5.
17. ^ *Shonagon, Sei* (30 November 2006). *The Pillow Book*. Penguin UK. ISBN 978-0-14-190694-2.
18. ^ New International Encyclopedia
19. ^ 'Charles II, 1666: An Act for rebuilding the City of London.', Statutes of the Realm: volume 5: 1628–80 (1819), pp. 603–12. URL: [british-history.ac.uk](http://british-history.ac.uk), date accessed: 8 March 2007.
20. ^ 'Book 1, Ch. 15: From the Fire to the death of Charles II', A New History of London: Including Westminster and Southwark (1773), pp. 230–55. URL: <http://www.british-history.ac.uk/report.asp?compid=46732>. Date accessed: 7 March 2007.
21. ^ "A Brief History of Building Regulations". [www.npt.gov.uk](http://www.npt.gov.uk).
22. ^ *Baltimore (Md.) (1891). Ordinances and Resolutions of the Mayor and City Council of Baltimore ...* – via [books.google.com](http://books.google.com).
23. ^ *Baltimore: The Building of an American City*, Sherry H. Olson, Published 1997, Johns Hopkins University Press, Baltimore (Md.), ISBN 0-8018-5640-X, p. 248.



24. ^ Puleo, Stephen (2004). *Dark Tide: The Great Boston Molasses Flood of 1919*. Beacon Press. ISBN 0-8070-5021-0.
25. ^ "SB 721- CHAPTERED". *leginfo.legislature.ca.gov*. Retrieved 15 January 2025.
26. ^ gh, amir (18 December 2024). "California Balcony Building Code Updates 2025 - DrBalcony". Retrieved 15 January 2025.cite web: CS1 maint: url-status (link)
27. ^ "Residential Code Status | The Building Codes Assistance Project". *bcapcodes.org*. 12 November 2015. Retrieved 11 September 2018.

## External links

[edit]

image not found or type unknown



Wikimedia Commons has media related to ***Building and Fire Code Violations***.

- IAPMO Website
- IAPMO Codes Website

- v
- t
- e

<span></span>	Construction	
<span></span>		
<b>Types</b>	<div> <ul style="list-style-type: none"><li><span><span>○</span></span> Home construction</li> <li><span><span>○</span></span> Offshore construction</li> <li><span><span>○</span></span> Underground construction <ul style="list-style-type: none"><li><span><span>○</span></span> Tunnel construction</li></ul></li></ul> </div>	
<b>History</b>	<div> <ul style="list-style-type: none"><li><span><span>○</span></span> Architecture</li> <li><span><span>○</span></span> Construction</li> <li><span><span>○</span></span> Structural engineering</li> <li><span><span>○</span></span> Timeline of architecture</li> <li><span><span>○</span></span> Water supply and sanitation</li></ul> </div>	

## **Professions**

- Architect
- Building engineer
- Building estimator
- Building officials
- Chartered Building Surveyor
- Civil engineer
- Civil estimator
- Clerk of works
- Project manager
- Quantity surveyor
- Site manager
- Structural engineer
- Superintendent

## **Trades workers (List)**

- Banksman
- Boilermaker
- Bricklayer
- Carpenter
- Concrete finisher
- Construction foreman
- Construction worker
- Electrician
- Glazier
- Ironworker
- Millwright
- Plasterer
- Plumber
- Roofer
- Steel fixer
- Welder

<b>Organizations</b>	<ul style="list-style-type: none"> <li>○ American Institute of Constructors (AIC)</li> <li>○ American Society of Civil Engineers (ASCE)</li> <li>○ Asbestos Testing and Consultancy Association (ATAC)</li> <li>○ Associated General Contractors of America (AGC)</li> <li>○ Association of Plumbing and Heating Contractors (APHC)</li> <li>○ Build UK</li> <li>○ Construction History Society</li> <li>○ Chartered Institution of Civil Engineering Surveyors (CICES)</li> <li>○ Chartered Institute of Plumbing and Heating Engineering (CIPHE)</li> <li>○ Civil Engineering Contractors Association (CECA)</li> <li>○ The Concrete Society</li> <li>○ Construction Management Association of America (CMAA)</li> <li>○ Construction Specifications Institute (CSI)</li> <li>○ FIDIC</li> <li>○ Home Builders Federation (HBF)</li> <li>○ Lighting Association</li> <li>○ National Association of Home Builders (NAHB)</li> <li>○ National Association of Women in Construction (NAWIC)</li> <li>○ National Fire Protection Association (NFPA)</li> <li>○ National Kitchen &amp; Bath Association (NKBA)</li> <li>○ National Railroad Construction and Maintenance Association (NRC)</li> <li>○ National Tile Contractors Association (NTCA)</li> <li>○ Railway Tie Association (RTA)</li> <li>○ Royal Institution of Chartered Surveyors (RICS)</li> <li>○ Scottish Building Federation (SBF)</li> <li>○ Society of Construction Arbitrators</li> </ul>
<b>By country</b>	<ul style="list-style-type: none"> <li>○ India</li> <li>○ Iran</li> <li>○ Japan</li> <li>○ Romania</li> <li>○ Turkey</li> <li>○ United Kingdom</li> <li>○ United States</li> </ul>
<b>Regulation</b>	<ul style="list-style-type: none"> <li>○ Building code</li> <li>○ Construction law</li> <li>○ Site safety</li> <li>○ Zoning</li> </ul>

## **Architecture**

- Style
  - List
- Industrial architecture
  - British
- Indigenous architecture
- Interior architecture
- Landscape architecture
- Vernacular architecture

## **Engineering**

- Architectural engineering
- Building services engineering
- Civil engineering
  - Coastal engineering
  - Construction engineering
  - Structural engineering
- Earthquake engineering
- Environmental engineering
- Geotechnical engineering

## **Methods**


- List
- Earthbag construction
- Modern methods of construction
- Monocrete construction
- Slip forming

- Building material
  - List of building materials
  - Millwork
- Construction bidding
- Construction delay
- Construction equipment theft
- Construction loan
- Construction management
- Construction waste
- Demolition
- Design–build
- Design–bid–build
- DfMA
- Heavy equipment
- Interior design
- Lists of buildings and structures
  - List of tallest buildings and structures
- Megaproject
- Megastructure
- Plasterwork
  - Damp
    - Proofing
  - Parge coat
  - Roughcast
    - Harling
- Real estate development
- Stonemasonry
- Sustainability in construction
- Unfinished building
- Urban design
- Urban planning


## Other topics

 Outline  Category


## About geotechnical engineering

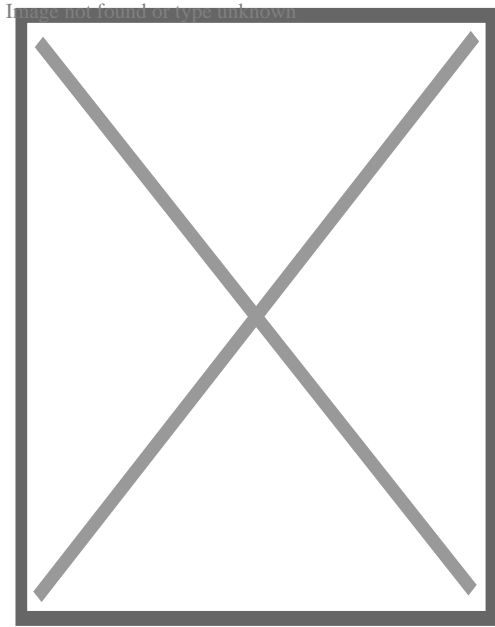

Boston's Big Dig presented geotechnical challenges in an urban environment.

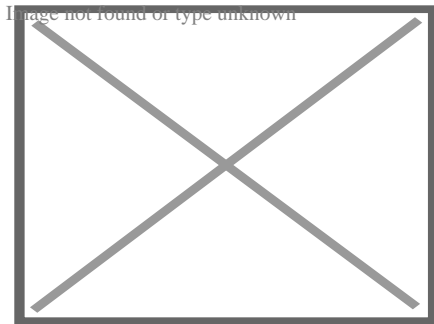

Precast concrete retaining wall

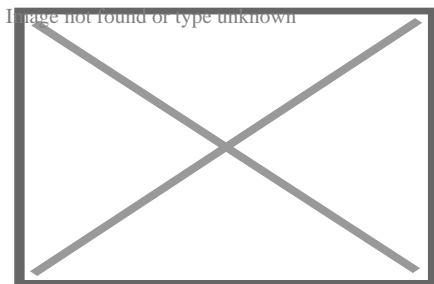

A typical cross-section of a slope used in two-dimensional analyzes.

**Geotechnical engineering**, also known as **geotechnics**, is the branch of civil engineering concerned with the engineering behavior of earth materials. It uses the principles of soil mechanics and rock mechanics to solve its engineering problems. It also relies on knowledge of geology, hydrology, geophysics, and other related sciences.

Geotechnical engineering has applications in military engineering, mining engineering, petroleum engineering, coastal engineering, and offshore construction. The fields of geotechnical engineering and engineering geology have overlapping knowledge areas. However, while geotechnical engineering is a specialty of civil engineering, engineering geology

is a specialty of geology.

## History

[edit]

Humans have historically used soil as a material for flood control, irrigation purposes, burial sites, building foundations, and construction materials for buildings. Dykes, dams, and canals dating back to at least 2000 BCE—found in parts of ancient Egypt, ancient Mesopotamia, the Fertile Crescent, and the early settlements of Mohenjo Daro and Harappa in the Indus valley—provide evidence for early activities linked to irrigation and flood control. As cities expanded, structures were erected and supported by formalized foundations. The ancient Greeks notably constructed pad footings and strip-and-raft foundations. Until the 18th century, however, no theoretical basis for soil design had been developed, and the discipline was more of an art than a science, relying on experience.<sup>[1]</sup>

Several foundation-related engineering problems, such as the Leaning Tower of Pisa, prompted scientists to begin taking a more scientific-based approach to examining the subsurface. The earliest advances occurred in the development of earth pressure theories for the construction of retaining walls. Henri Gautier, a French royal engineer, recognized the "natural slope" of different soils in 1717, an idea later known as the soil's angle of repose. Around the same time, a rudimentary soil classification system was also developed based on a material's unit weight, which is no longer considered a good indication of soil type.<sup>[1]</sup><sup>[2]</sup>

The application of the principles of mechanics to soils was documented as early as 1773 when Charles Coulomb, a physicist and engineer, developed improved methods to determine the earth pressures against military ramparts. Coulomb observed that, at failure, a distinct slip plane would form behind a sliding retaining wall and suggested that the maximum shear stress on the slip plane, for design purposes, was the sum of the soil cohesion,  $\displaystyle c$ , and  $\displaystyle \tan(\phi)\sigma_n$ , where  $\displaystyle \sigma_n$  is the normal stress on the slip plane and  $\displaystyle \phi$  is the angle of internal friction of the soil. By combining Coulomb's theory with Christian Otto Mohr's 2D stress state, the theory became known as Mohr-Coulomb theory. Although it is now recognized that precise determination of cohesion is impossible because  $\displaystyle c$  is not a fundamental soil property, the Mohr-Coulomb theory is still used in practice today.<sup>[3]</sup>

In the 19th century, Henry Darcy developed what is now known as Darcy's Law, describing the flow of fluids in a porous media. Joseph Boussinesq, a mathematician and physicist, developed theories of stress distribution in elastic solids that proved useful for estimating stresses at depth in the ground. William Rankine, an engineer and physicist, developed an alternative to Coulomb's earth pressure theory. Albert Atterberg developed the clay consistency indices that are still used today for soil classification.<sup>[1]</sup><sup>[2]</sup> In 1885, Osborne Reynolds recognized that shearing causes volumetric dilation of dense materials and contraction of loose granular materials.

Modern geotechnical engineering is said to have begun in 1925 with the publication of *Erdbaumechnik* by Karl von Terzaghi, a mechanical engineer and geologist. Considered by many to be the father of modern soil mechanics and geotechnical engineering, Terzaghi developed the principle of effective stress, and demonstrated that the shear strength of soil is controlled by effective stress.<sup>[4]</sup> Terzaghi also developed the framework for theories of bearing capacity of foundations, and the theory for prediction of the rate of settlement of clay layers due to consolidation.<sup>[1][3][5]</sup> Afterwards, Maurice Biot fully developed the three-dimensional soil consolidation theory, extending the one-dimensional model previously developed by Terzaghi to more general hypotheses and introducing the set of basic equations of Poroelasticity.

In his 1948 book, Donald Taylor recognized that the interlocking and dilation of densely packed particles contributed to the peak strength of the soil. Roscoe, Schofield, and Wroth, with the publication of *On the Yielding of Soils* in 1958, established the interrelationships between the volume change behavior (dilation, contraction, and consolidation) and shearing behavior with the theory of plasticity using critical state soil mechanics. Critical state soil mechanics is the basis for many contemporary advanced constitutive models describing the behavior of soil.<sup>[6]</sup>

In 1960, Alec Skempton carried out an extensive review of the available formulations and experimental data in the literature about the effective stress validity in soil, concrete, and rock in order to reject some of these expressions, as well as clarify what expressions were appropriate according to several working hypotheses, such as stress-strain or strength behavior, saturated or non-saturated media, and rock, concrete or soil behavior.

## Roles

[edit]

## Geotechnical investigation

[edit]

Main article: Geotechnical investigation

Geotechnical engineers investigate and determine the properties of subsurface conditions and materials. They also design corresponding earthworks and retaining structures, tunnels, and structure foundations, and may supervise and evaluate sites, which may further involve site monitoring as well as the risk assessment and mitigation of natural hazards.<sup>[7][8]</sup>

Geotechnical engineers and engineering geologists perform geotechnical investigations to obtain information on the physical properties of soil and rock underlying and adjacent to a site to design earthworks and foundations for proposed structures and for the repair of distress to earthworks and structures caused by subsurface conditions. Geotechnical investigations involve surface and subsurface exploration of a site, often including subsurface sampling and laboratory testing of retrieved soil samples. Sometimes, geophysical methods are also used to obtain data, which include measurement of seismic waves (pressure, shear, and Rayleigh waves), surface-wave methods and downhole methods, and electromagnetic surveys



(magnetometer, resistivity, and ground-penetrating radar). Electrical tomography can be used to survey soil and rock properties and existing underground infrastructure in construction projects.[<sup>9]</sup>

Surface exploration can include on-foot surveys, geologic mapping, geophysical methods, and photogrammetry. Geologic mapping and interpretation of geomorphology are typically completed in consultation with a geologist or engineering geologist. Subsurface exploration usually involves in-situ testing (for example, the standard penetration test and cone penetration test). The digging of test pits and trenching (particularly for locating faults and slide planes) may also be used to learn about soil conditions at depth. Large-diameter borings are rarely used due to safety concerns and expense. Still, they are sometimes used to allow a geologist or engineer to be lowered into the borehole for direct visual and manual examination of the soil and rock stratigraphy.

Various soil samplers exist to meet the needs of different engineering projects. The standard penetration test, which uses a thick-walled split spoon sampler, is the most common way to collect disturbed samples. Piston samplers, employing a thin-walled tube, are most commonly used to collect less disturbed samples. More advanced methods, such as the Sherbrooke block sampler, are superior but expensive. Coring frozen ground provides high-quality undisturbed samples from ground conditions, such as fill, sand, moraine, and rock fracture zones.[<sup>10]</sup>

Geotechnical centrifuge modeling is another method of testing physical-scale models of geotechnical problems. The use of a centrifuge enhances the similarity of the scale model tests involving soil because soil's strength and stiffness are susceptible to the confining pressure. The centrifugal acceleration allows a researcher to obtain large (prototype-scale) stresses in small physical models.

## **Foundation design**


[edit]

Main article: Foundation (engineering)

The foundation of a structure's infrastructure transmits loads from the structure to the earth. Geotechnical engineers design foundations based on the load characteristics of the structure and the properties of the soils and bedrock at the site. Generally, geotechnical engineers first estimate the magnitude and location of loads to be supported before developing an investigation plan to explore the subsurface and determine the necessary soil parameters through field and lab testing. Following this, they may begin the design of an engineering foundation. The primary considerations for a geotechnical engineer in foundation design are bearing capacity, settlement, and ground movement beneath the foundations.[<sup>11]</sup>

## **Earthworks**

[edit]

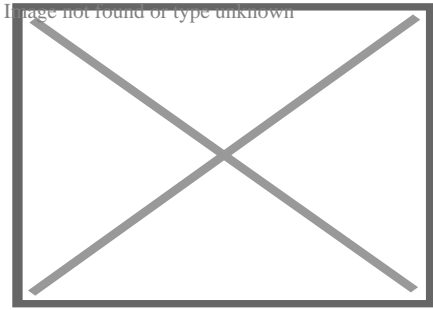

A compactor/roller operated by U.S. Navy Seabees

See also: Earthworks (engineering)

Geotechnical engineers are also involved in the planning and execution of earthworks, which include ground improvement,<sup>[11]</sup> slope stabilization, and slope stability analysis.


## Ground improvement

[edit]

Various geotechnical engineering methods can be used for ground improvement, including reinforcement geosynthetics such as geocells and geogrids, which disperse loads over a larger area, increasing the soil's load-bearing capacity. Through these methods, geotechnical engineers can reduce direct and long-term costs.<sup>[12]</sup>

## Slope stabilization

[edit]

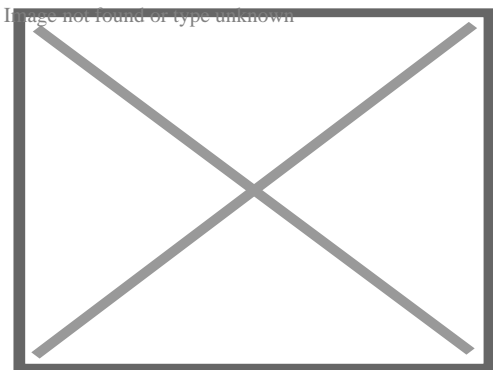

Simple slope slip section.

Main article: Slope stability

Geotechnical engineers can analyze and improve slope stability using engineering methods. Slope stability is determined by the balance of shear stress and shear strength. A previously stable slope may be initially affected by various factors, making it unstable. Nonetheless,

geotechnical engineers can design and implement engineered slopes to increase stability.

## Slope stability analysis

[edit]

Main article: Slope stability analysis

Stability analysis is needed to design engineered slopes and estimate the risk of slope failure in natural or designed slopes by determining the conditions under which the topmost mass of soil will slip relative to the base of soil and lead to slope failure.<sup>[13]</sup> If the interface between the mass and the base of a slope has a complex geometry, slope stability analysis is difficult and numerical solution methods are required. Typically, the interface's exact geometry is unknown, and a simplified interface geometry is assumed. Finite slopes require three-dimensional models to be analyzed, so most slopes are analyzed assuming that they are infinitely wide and can be represented by two-dimensional models.


## Sub-disciplines

[edit]

## Geosynthetics

[edit]

Main article: Geosynthetics

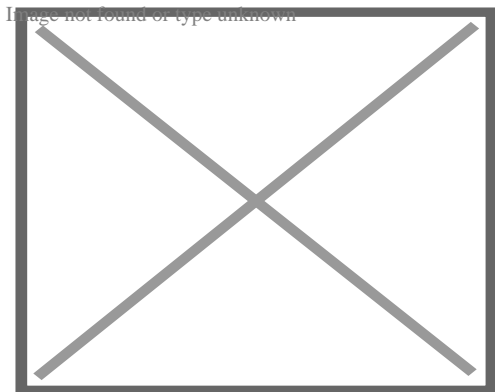

A collage of geosynthetic products.


Geosynthetics are a type of plastic polymer products used in geotechnical engineering that improve engineering performance while reducing costs. This includes geotextiles, geogrids, geomembranes, geocells, and geocomposites. The synthetic nature of the products make them suitable for use in the ground where high levels of durability are required. Their main functions include drainage, filtration, reinforcement, separation, and containment.

Geosynthetics are available in a wide range of forms and materials, each to suit a slightly different end-use, although they are frequently used together. Some reinforcement geosynthetics, such as geogrids and more recently, cellular confinement systems, have shown to improve bearing capacity, modulus factors and soil stiffness and strength.<sup>[14]</sup> These products have a wide range of applications and are currently used in many civil and geotechnical engineering applications including roads, airfields, railroads, embankments, piled embankments, retaining structures, reservoirs, canals, dams, landfills, bank protection and coastal engineering.<sup>[15]</sup>

## Offshore

[edit]

Main article: Offshore geotechnical engineering

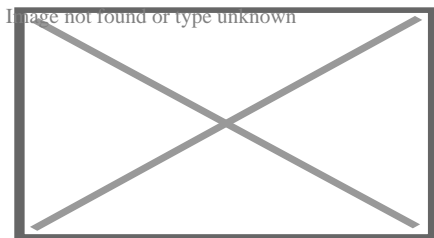

Platforms offshore Mexico.

*Offshore* (or *marine*) *geotechnical engineering* is concerned with foundation design for human-made structures in the sea, away from the coastline (in opposition to *onshore* or *nearshore* engineering). Oil platforms, artificial islands and submarine pipelines are examples of such structures.<sup>[16]</sup>

There are a number of significant differences between onshore and offshore geotechnical engineering.<sup>[16][17]</sup> Notably, site investigation and ground improvement on the seabed are more expensive; the offshore structures are exposed to a wider range of geohazards; and the environmental and financial consequences are higher in case of failure. Offshore structures are exposed to various environmental loads, notably wind, waves and currents. These phenomena may affect the integrity or the serviceability of the structure and its foundation during its operational lifespan and need to be taken into account in offshore design.

In subsea geotechnical engineering, seabed materials are considered a two-phase material composed of rock or mineral particles and water.<sup>[18][19]</sup> Structures may be fixed in place in the seabed—as is the case for piers, jetties and fixed-bottom wind turbines—or may comprise a floating structure that remains roughly fixed relative to its geotechnical anchor point. Undersea mooring of human-engineered floating structures include a large number of offshore oil and gas platforms and, since 2008, a few floating wind turbines. Two common types of engineered design for anchoring floating structures include tension-leg and catenary loose mooring systems.<sup>[20]</sup>

## Observational method

[edit]

First proposed by Karl Terzaghi and later discussed in a paper by Ralph B. Peck, the observational method is a managed process of construction control, monitoring, and review, which enables modifications to be incorporated during and after construction. The method aims to achieve a greater overall economy without compromising safety by creating designs based on the most probable conditions rather than the most unfavorable.<sup>[21]</sup> Using the observational method, gaps in available information are filled by measurements and investigation, which aid in assessing the behavior of the structure during construction, which in turn can be modified per the findings. The method was described by Peck as "learn-as-you-go".<sup>[22]</sup>


The observational method may be described as follows:<sup>[22]</sup>

1. General exploration sufficient to establish the rough nature, pattern, and properties of deposits.
2. Assessment of the most probable conditions and the most unfavorable conceivable deviations.
3. Creating the design based on a working hypothesis of behavior anticipated under the most probable conditions.
4. Selection of quantities to be observed as construction proceeds and calculating their anticipated values based on the working hypothesis under the most unfavorable conditions.
5. Selection, in advance, of a course of action or design modification for every foreseeable significant deviation of the observational findings from those predicted.
6. Measurement of quantities and evaluation of actual conditions.
7. Design modification per actual conditions

The observational method is suitable for construction that has already begun when an unexpected development occurs or when a failure or accident looms or has already happened. It is unsuitable for projects whose design cannot be altered during construction.<sup>[22]</sup>

## See also

[edit]

-  **Engineering portal**
- Civil engineering
- Deep Foundations Institute
- Earthquake engineering
- Earth structure

- Effective stress
- Engineering geology
- Geological Engineering
- Geoprofessions
- Hydrogeology
- International Society for Soil Mechanics and Geotechnical Engineering
- Karl von Terzaghi
- Land reclamation
- Landfill
- Mechanically stabilized earth
- Offshore geotechnical engineering
- Rock mass classifications
- Sediment control
- Seismology
- Soil mechanics
- Soil physics
- Soil science

## Notes

[edit]

1. ^ **a b c d** Das, Braja (2006). *Principles of Geotechnical Engineering*. Thomson Learning.
2. ^ **a b** Budhu, Muni (2007). *Soil Mechanics and Foundations*. John Wiley & Sons, Inc. ISBN 978-0-471-43117-6.
3. ^ **a b** Disturbed soil properties and geotechnical design, Schofield, Andrew N., Thomas Telford, 2006. ISBN 0-7277-2982-9
4. ^ Guerriero V., Mazzoli S. (2021). "Theory of Effective Stress in Soil and Rock and Implications for Fracturing Processes: A Review". *Geosciences*. **11** (3): 119. Bibcode:2021Geosc..11..119G. doi:10.3390/geosciences11030119.
5. ^ Soil Mechanics, Lambe, T. William and Whitman, Robert V., Massachusetts Institute of Technology, John Wiley & Sons., 1969. ISBN 0-471-51192-7
6. ^ Soil Behavior and Critical State Soil Mechanics, Wood, David Muir, Cambridge University Press, 1990. ISBN 0-521-33782-8
7. ^ Terzaghi, K., Peck, R.B. and Mesri, G. (1996), *Soil Mechanics in Engineering Practice* 3rd Ed., John Wiley & Sons, Inc. ISBN 0-471-08658-4
8. ^ Holtz, R. and Kovacs, W. (1981), *An Introduction to Geotechnical Engineering*, Prentice-Hall, Inc. ISBN 0-13-484394-0
9. ^ Deep Scan Tech (2023): Deep Scan Tech uncovers hidden structures at the site of Denmark's tallest building.
10. ^ "Geofrost Coring". *GEOFROST*. Retrieved 20 November 2020.

11. ^ **a b** Han, Jie (2015). *Principles and Practice of Ground Improvement*. Wiley. ISBN 9781118421307.
12. ^ RAJU, V. R. (2010). *Ground Improvement Technologies and Case Histories*. Singapore: Research Publishing Services. p. 809. ISBN 978-981-08-3124-0. *Ground Improvement – Principles And Applications In Asia*.
13. ^ Pariseau, William G. (2011). *Design analysis in rock mechanics*. CRC Press.
14. ^ Hegde, A.M. and Palsule P.S. (2020), Performance of Geosynthetics Reinforced Subgrade Subjected to Repeated Vehicle Loads: Experimental and Numerical Studies. *Front. Built Environ.* 6:15. <https://www.frontiersin.org/articles/10.3389/fbuil.2020.00015/full>.
15. ^ Koerner, Robert M. (2012). *Designing with Geosynthetics (6th Edition, Vol. 1 ed.)*. Xlibris. ISBN 9781462882892.
16. ^ **a b** Dean, E.T.R. (2010). *Offshore Geotechnical Engineering – Principles and Practice*. Thomas Telford, Reston, VA, 520 p.
17. ^ Randolph, M. and Gourvenec, S., 2011. *Offshore geotechnical engineering*. Spon Press, N.Y., 550 p.
18. ^ Das, B.M., 2010. *Principles of geotechnical engineering*. Cengage Learning, Stamford, 666 p.
19. ^ Atkinson, J., 2007. *The mechanics of soils and foundations*. Taylor & Francis, N.Y., 442 p.
20. ^ Floating Offshore Wind Turbines: Responses in a Sea state – Pareto Optimal Designs and Economic Assessment, P. Scavounos et al., October 2007.
21. ^ Nicholson, D, Tse, C and Penny, C. (1999). *The Observational Method in ground engineering – principles and applications*. Report 185, CIRIA, London.
22. ^ **a b c** Peck, R.B (1969). Advantages and limitations of the observational method in applied soil mechanics, *Geotechnique*, 19, No. 1, pp. 171-187.

## References

[edit]

- Bates and Jackson, 1980, *Glossary of Geology*: American Geological Institute.
- Krynine and Judd, 1957, *Principles of Engineering Geology and Geotechnics*: McGraw-Hill, New York.
- Ventura, Pierfranco, 2019, *Fondazioni*, Volume 1, *Modellazioni statiche e sismiche*, Hoepli, Milano

- Holtz, R. and Kovacs, W. (1981), *An Introduction to Geotechnical Engineering*, Prentice-Hall, Inc. ISBN 0-13-484394-0
- Bowles, J. (1988), *Foundation Analysis and Design*, McGraw-Hill Publishing Company. ISBN 0-07-006776-7
- Cedergren, Harry R. (1977), *Seepage, Drainage, and Flow Nets*, Wiley. ISBN 0-471-14179-8
- Kramer, Steven L. (1996), *Geotechnical Earthquake Engineering*, Prentice-Hall, Inc. ISBN 0-13-374943-6
- Freeze, R.A. & Cherry, J.A., (1979), *Groundwater*, Prentice-Hall. ISBN 0-13-365312-9
- Lunne, T. & Long, M., (2006), *Review of long seabed samplers and criteria for new sampler design*, Marine Geology, Vol 226, p. 145–165
- Mitchell, James K. & Soga, K. (2005), *Fundamentals of Soil Behavior* 3rd ed., John Wiley & Sons, Inc. ISBN 978-0-471-46302-3
- Rajapakse, Ruwan., (2005), "Pile Design and Construction", 2005. ISBN 0-9728657-1-3
- Fang, H.-Y. and Daniels, J. (2005) *Introductory Geotechnical Engineering : an environmental perspective*, Taylor & Francis. ISBN 0-415-30402-4
- NAVFAC (Naval Facilities Engineering Command) (1986) *Design Manual 7.01, Soil Mechanics*, US Government Printing Office
- NAVFAC (Naval Facilities Engineering Command) (1986) *Design Manual 7.02, Foundations and Earth Structures*, US Government Printing Office
- NAVFAC (Naval Facilities Engineering Command) (1983) *Design Manual 7.03, Soil Dynamics, Deep Stabilization and Special Geotechnical Construction*, US Government Printing Office
- Terzaghi, K., Peck, R.B. and Mesri, G. (1996), *Soil Mechanics in Engineering Practice* 3rd Ed., John Wiley & Sons, Inc. ISBN 0-471-08658-4
- Santamarina, J.C., Klein, K.A., & Fam, M.A. (2001), "Soils and Waves: Particulate Materials Behavior, Characterization and Process Monitoring", Wiley, ISBN 978-0-471-49058-6
- Firuziaan, M. and Estorff, O., (2002), "Simulation of the Dynamic Behavior of Bedding-Foundation-Soil in the Time Domain", Springer Verlag.

## External links

[edit]

- Worldwide Geotechnical Literature Database

- v
- t
- e



## Engineering

- History
- Outline
- List of engineering branches

## Civil

- Architectural
- Coastal
- Construction
- Earthquake
- Ecological
- Environmental
  - Sanitary
- Geological
- Geotechnical
- Hydraulic
- Mining
- Municipal/urban
- Offshore
- River
- Structural
- Transportation
  - Traffic
  - Railway


## Mechanical

- Acoustic
- Aerospace
- Automotive
- Biomechanical
- Energy
- Manufacturing
- Marine
- Naval architecture
- Railway
- Sports
- Thermal
- Tribology

## Electrical

- Broadcast
  - outline
- Control
- Electromechanics
- Electronics
- Microwaves
- Optical
- Power
- Radio-frequency
- Signal processing
- Telecommunications

**Specialties  
and  
interdisciplinarity**



- Biochemical/bioprocess

## **Engineering education**

- Bachelor of Engineering
- Bachelor of Science
- Master's degree
- Doctorate
- Graduate certificate
- Engineer's degree
- Licensed engineer

## **Related topics**

- Engineer

## **Glossaries**

- Engineering
  - A–L
  - M–Z
- Aerospace engineering
- Civil engineering
- Electrical and electronics engineering
- Mechanical engineering
- Structural engineering

## **Other**

- Agricultural
- Audio
- Automation
- Biomedical
  - Bioinformatics
  - Clinical
  - Health technology
  - Pharmaceutical
  - Rehabilitation
- Building services
  - MEP
- Design
- Explosives
- Facilities
- Fire
- Forensic
- Climate
- Geomatics
- Graphics
- Industrial
- Information
- Instrumentation
  - Instrumentation and control
- Logistics
- Management
- Mathematics
- Mechatronics
- Military
- Nuclear
- Ontology
- Packaging
- Physics
- Privacy
- Safety
- Security
- Survey
- Sustainability
- Systems
- Textile

-  **Category**
-  **Commons**
-  **WikiProject**
-  **Portal**


- **v**
- **t**
- **e**

**Soil science**

- **History**
- **Index**

**Main fields**

- **Pedology**
- **Edaphology**
- **Soil biology**
- **Soil microbiology**
- **Soil zoology**
- **Soil ecology**
- **Soil physics**
- **Soil mechanics**
- **Soil chemistry**
- **Environmental soil science**
- **Agricultural soil science**



## **Soil topics**

- Soil
- Pedosphere
  - Soil morphology
  - Pedodiversity
  - Soil formation
- Soil erosion
- Soil contamination
- Soil retrogression and degradation
- Soil compaction
  - Soil compaction (agriculture)
- Soil sealing
- Soil salinity
  - Alkali soil
- Soil pH
  - Soil acidification
- Soil health
- Soil life
- Soil biodiversity
- Soil quality
- Soil value
- Soil fertility
- Soil resilience
- Soil color
- Soil texture
- Soil structure
  - Pore space in soil
  - Pore water pressure
- Soil crust
- Soil horizon
- Soil biomantle
- Soil carbon
- Soil gas
  - Soil respiration
- Soil organic matter
- Soil moisture
  - Soil water (retention)

- **v**
- **t**
- **e**

## Soil classification

### World Reference Base for Soil Resources (1998–)

- Acrisols
- Alisols
- Andosols
- Anthrosols
- Arenosols
- Calcisols
- Cambisols
- Chernozem
- Cryosols
- Durisols
- Ferralsols
- Fluvisols
- Gleysols
- Gypsisols
- Histosol
- Kastanozems
- Leptosols
- Lixisols
- Luvisols
- Nitisols
- Phaeozems
- Planosols
- Plinthosols
- Podzols
- Regosols
- Retisols
- Solonchaks
- Solonetz
- Stagnosol
- Technosols
- Umbrisols
- Vertisols

### USDA soil taxonomy

- Alfisols
- Andisols
- Aridisols
- Entisols
- Gelisols
- Histosols
- Inceptisols

## **Applications**

- Soil conservation
- Soil management
- Soil guideline value
- Soil survey
- Soil test
- Soil governance
- Soil value
- Soil salinity control
- Erosion control
- Agroecology
- Liming (soil)

## **Related fields**

- Geology
- Geochemistry
- Petrology
- Geomorphology
- Geotechnical engineering
- Hydrology
- Hydrogeology
- Biogeography
- Earth materials
- Archaeology
- Agricultural science
  - Agrology

## **Societies, Initiatives**

- Australian Society of Soil Science Incorporated
- Canadian Society of Soil Science
- Central Soil Salinity Research Institute (India)
- German Soil Science Society
- Indian Institute of Soil Science
- International Union of Soil Sciences
- International Year of Soil
- National Society of Consulting Soil Scientists (US)
- OPAL Soil Centre (UK)
- Soil Science Society of Poland
- Soil and Water Conservation Society (US)
- Soil Science Society of America
- World Congress of Soil Science





## Scientific journals

- *Acta Agriculturae Scandinavica B*
- *Journal of Soil and Water Conservation*
- *Plant and Soil*
- *Pochvovedenie*
- *Soil Research*
- *Soil Science Society of America Journal*

## See also

- Land use
- Land conversion
- Land management
- Vegetation
- Infiltration (hydrology)
- Groundwater
- Crust (geology)
- Impervious surface/Surface runoff
- Petrichor

-  [Wikipedia:WikiProject Soil](#)
-  [Category soil](#)
- [Category soil science](#)
-  [List of soil scientists](#)





















- **v**
- **t**
- **e**

Geotechnical engineering

Offshore geotechnical engineering

## Investigation and instrumentation

### Field (*in situ*)

-  Core drill
-  Cone penetration test
-  Geo-electrical sounding
-  Permeability test
-  Load test
  - Static
  - Dynamic
  - Statnamic
-  Pore pressure measurement
  - Piezometer
  - Well
-  Ram sounding
-  Rock control drilling
-  Rotary-pressure sounding
-  Rotary weight sounding
-  Sample series
-  Screw plate test
- Deformation monitoring
  -  Incliner
  -  Settlement recordings
-  Shear vane test
-  Simple sounding
-  Standard penetration test
-  Total sounding
-  Trial pit
-  Visible bedrock
- Nuclear densometer test
- Exploration geophysics
- Crosshole sonic logging

## Soil

### Types

- Clay
- Silt
- Sand
- Gravel
- Peat
- Loam
- Loess

### Properties

- Hydraulic conductivity
- Water content
- Void ratio
- Bulk density
- Thixotropy
- Reynolds' dilatancy
- Angle of repose
- Friction angle
- Cohesion
- Porosity
- Permeability
- Specific storage
- Shear strength
- Sensitivity

**Structures  
(Interaction)**

Natural features

- Topography
- Vegetation
- Terrain
- Topsoil
- Water table
- Bedrock
- Subgrade
- Subsoil

Earthworks

- Shoring structures
  - Retaining walls
  - Gabion
  - Ground freezing
  - Mechanically stabilized earth
  - Pressure grouting
  - Slurry wall
  - Soil nailing
  - Tieback
- Land development
- Landfill
- Excavation
- Trench
- Embankment
- Cut
- Causeway
- Terracing
- Cut-and-cover
- Cut and fill
- Fill dirt
- Grading
- Land reclamation
- Track bed
- Erosion control
- Earth structure
- Expanded clay aggregate
- Crushed stone
- Geosynthetics
  - Geotextile
  - Geomembrane
  - Geosynthetic clay liner
  - Cellular confinement
- Infiltration

Foundations

- Shallow
- Deep

## Forces

- Effective stress
- Pore water pressure
- Lateral earth pressure
- Overburden pressure
- Preconsolidation pressure

## Mechanics

### Phenomena/ problems

- Permafrost
- Frost heaving
- Consolidation
- Compaction
- Earthquake
  - Response spectrum
  - Seismic hazard
  - Shear wave
- Landslide analysis
  - Stability analysis
  - Mitigation
  - Classification
  - Sliding criterion
  - Slab stabilisation
- Bearing capacity \* Stress distribution in soil

## Numerical analysis software

- SEEP2D
- STABL
- SVFlux
- SVSlope
- UTEXAS
- Plaxis

## **Related fields**

- Geology
- Geochemistry
- Petrology
- Earthquake engineering
- Geomorphology
- Soil science
- Hydrology
- Hydrogeology
- Biogeography
- Earth materials
- Archaeology
- Agricultural science
  - Agrology

- v
- t
- e

## **Construction**

### **Types**

- Home construction
- Offshore construction
- Underground construction
  - Tunnel construction

### **History**

- Architecture
- Construction
- Structural engineering
- Timeline of architecture
- Water supply and sanitation

## **Professions**

- Architect
- Building engineer
- Building estimator
- Building officials
- Chartered Building Surveyor
- Civil engineer
- Civil estimator
- Clerk of works
- Project manager
- Quantity surveyor
- Site manager
- Structural engineer
- Superintendent

## **Trades workers (List)**

- Banksman
- Boilermaker
- Bricklayer
- Carpenter
- Concrete finisher
- Construction foreman
- Construction worker
- Electrician
- Glazier
- Ironworker
- Millwright
- Plasterer
- Plumber
- Roofer
- Steel fixer
- Welder

<b>Organizations</b>	<ul style="list-style-type: none"> <li>○ American Institute of Constructors (AIC)</li> <li>○ American Society of Civil Engineers (ASCE)</li> <li>○ Asbestos Testing and Consultancy Association (ATAC)</li> <li>○ Associated General Contractors of America (AGC)</li> <li>○ Association of Plumbing and Heating Contractors (APHC)</li> <li>○ Build UK</li> <li>○ Construction History Society</li> <li>○ Chartered Institution of Civil Engineering Surveyors (CICES)</li> <li>○ Chartered Institute of Plumbing and Heating Engineering (CIPHE)</li> <li>○ Civil Engineering Contractors Association (CECA)</li> <li>○ The Concrete Society</li> <li>○ Construction Management Association of America (CMAA)</li> <li>○ Construction Specifications Institute (CSI)</li> <li>○ FIDIC</li> <li>○ Home Builders Federation (HBF)</li> <li>○ Lighting Association</li> <li>○ National Association of Home Builders (NAHB)</li> <li>○ National Association of Women in Construction (NAWIC)</li> <li>○ National Fire Protection Association (NFPA)</li> <li>○ National Kitchen &amp; Bath Association (NKBA)</li> <li>○ National Railroad Construction and Maintenance Association (NRC)</li> <li>○ National Tile Contractors Association (NTCA)</li> <li>○ Railway Tie Association (RTA)</li> <li>○ Royal Institution of Chartered Surveyors (RICS)</li> <li>○ Scottish Building Federation (SBF)</li> <li>○ Society of Construction Arbitrators</li> </ul>
<b>By country</b>	<ul style="list-style-type: none"> <li>○ India</li> <li>○ Iran</li> <li>○ Japan</li> <li>○ Romania</li> <li>○ Turkey</li> <li>○ United Kingdom</li> <li>○ United States</li> </ul>
<b>Regulation</b>	<ul style="list-style-type: none"> <li>○ Building code</li> <li>○ Construction law</li> <li>○ Site safety</li> <li>○ Zoning</li> </ul>



## **Architecture**

- Style
  - List
- Industrial architecture
  - British
- Indigenous architecture
- Interior architecture
- Landscape architecture
- Vernacular architecture

## **Engineering**

- Architectural engineering
- Building services engineering
- Civil engineering
  - Coastal engineering
  - Construction engineering
  - Structural engineering
- Earthquake engineering
- Environmental engineering
- Geotechnical engineering

## **Methods**

- List
- Earthbag construction
- Modern methods of construction
- Monocrete construction
- Slip forming



About Cook County

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Things To Do in Cook County

---

Photo

Image not found or type unknown

Sand Ridge Nature Center

4.8 (96)

Photo

Image not found or type unknown

**River Trail Nature Center**

**4.6 (235)**

**Photo**

Image not found or type unknown

**Palmisano (Henry) Park**

**4.7 (1262)**

## **Driving Directions in Cook County**

---

**Driving Directions From Palmisano (Henry) Park to**

**Driving Directions From Lake Katherine Nature Center and Botanic Gardens to**

**Driving Directions From Navy Pier to**


<https://www.google.com/maps/dir/Navy+Pier/United+Structural+Systems+of+Illinois%2C+87.6050944,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-87.6050944!2d41.8918633!1m5!1m1!1sChIJ-wSxDtinD4gRiv4kY3RRh9U!2m2!1d-88.1396465!2d42.0637725!3e0>

<https://www.google.com/maps/dir/Lake+Katherine+Nature+Center+and+Botanic+Gardens/87.8010774,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-87.8010774!2d41.6776048!1m5!1m1!1sChIJ-wSxDtinD4gRiv4kY3RRh9U!2m2!1d-88.1396465!2d42.0637725!3e2>

<https://www.google.com/maps/dir/Palmisano+%28Henry%29+Park/United+Structural+Systems+LLC/87.6490151,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-87.6490151!2d41.8429903!1m5!1m1!1sChIJ-wSxDtinD4gRiv4kY3RRh9U!2m2!1d-88.1396465!2d42.0637725!3e1>

## Reviews for


---



**Jeffery James**

**(5)**


Very happy with my experience. They were prompt and followed through, and very helpful in fixing the crack in my foundation.



**Sarah McNeily**

**(5)**

USS was excellent. They are honest, straightforward, trustworthy, and conscientious. They thoughtfully removed the flowers and flower bulbs to dig where they needed in the yard, replanted said flowers and spread the extra dirt to fill in an area of the yard. We've had other services from different companies and our yard was really a mess after. They kept the job site meticulously clean. The crew was on time and friendly. I'd recommend them any day! Thanks to Jessie and crew.




**Jim de Leon**

**(5)**

It was a pleasure to work with Rick and his crew. From the beginning, Rick listened to my concerns and what I wished to accomplish. Out of the 6 contractors that quoted the project, Rick seemed the MOST willing to accommodate my wishes. His pricing was definitely more than fair as well. I had 10 push piers installed to stabilize and lift an addition of my house. The project commenced at the date that Rick had disclosed initially and it was completed within the same time period expected (based on Rick's original assessment). The crew was well informed, courteous, and hard working. They were not loud (even while equipment was being utilized) and were well spoken. My neighbors were very impressed on how polite they were when they entered / exited my property (saying hello or good morning each day when they crossed paths). You can tell they care about the customer concerns. They ensured that the property would be put back as clean as possible by placing MANY sheets of plywood down prior to excavating. They compacted the dirt back in the holes extremely well to avoid large stock piles of soils. All the while, the main office was calling me to discuss updates and expectations of completion. They provided waivers of lien, certificates of insurance, properly acquired permits, and JULIE locates. From a construction background, I


can tell you that I did not see any flaws in the way they operated and this an extremely professional company. The pictures attached show the push piers added to the foundation (pictures 1, 2 & 3), the amount of excavation (picture 4), and the restoration after dirt was placed back in the pits and compacted (pictures 5, 6 & 7). Please notice that they also sealed two large cracks and steel plated these cracks from expanding further (which you can see under my sliding glass door). I, as well as my wife, are extremely happy that we chose United Structural Systems for our contractor. I would happily tell any of my friends and family to use this contractor should the opportunity arise!



**Chris Abplanalp**

**(5)**

USS did an amazing job on my underpinning on my house, they were also very courteous to the proximity of my property line next to my neighbor. They kept things in order with all the dirt/mud they had to excavate. They were done exactly in the timeframe they indicated, and the contract was very details oriented with drawings of what would be done. Only thing that would have been nice, is they left my concrete a little muddy with boot prints but again, all-in-all a great job



**Dave Kari**

**(5)**

What a fantastic experience! Owner Rick Thomas is a trustworthy professional. Nick and the crew are hard working, knowledgeable and experienced. I interviewed every company in the area, big and small. A homeowner never wants to hear that they have foundation issues. Out of every company, I trusted USS the most, and it paid off in the end. Highly recommend.

Evaluating Helical Pier Installations for Stability [View GBP](#)

**Check our other pages :**

- [Recognizing Liability Concerns in Construction Zones](#)
- [Prioritizing Protective Equipment for Repair Crews](#)
- [Addressing Wall Bowing with Specialized Bracing Systems](#)
- [Integrating Modern Engineering Software for Precise Calculations](#)
- [Complying with Floodplain Requirements in Vulnerable Regions](#)

United Structural Systems of Illinois, Inc

Phone : +18473822882

City : Hoffman Estates

State : IL

Zip : 60169

Address : 2124 Stonington Ave

**Google Business Profile**

Company Website : [\*\*https://www.unitedstructuralsystems.com/\*\*](https://www.unitedstructuralsystems.com/)

USEFUL LINKS

**Residential Foundation Repair Services**

**home foundation repair service**

**Foundation Repair Service**

**Sitemap**

**Privacy Policy**

**About Us**

